


Service Manual

PIONEER®
The Art of Entertainment



ORDER NO.
ARP2179

STEREO AMPLIFIER

A-P710

A-P510

A-P710 AND A-P510 HAVE THE FOLLOWING :

Type	Model		Power Requirement	Remarks
	A-P710	A-P510		
HE	○	○	AC 220V, 240V (switchable) *	
HB	○	○	AC 220V, 240V (switchable) *	
HEWZIW	○	○	AC 220V, 240V (switchable) *	
KUC	—	○	AC120V only	
SD	○	○	AC110V, 120V-127V, 220V, 240V (switchable)	

* Change the connection of the power transformer lead wire.

- This manual is applicable to the A-P710/HE, HB, A-P510/HE and HB types.
- As to the A-P710/HB and A-P510/HB types, refer to page 40.
- As to the other types, refer to applicable service manual.
- These products are components of systems. As to the system composition, refer to the system manuals.
- Each of these products does not function properly when independent; to avoid malfunctions, be sure to connect it to the prescribed system components, otherwise damage may result.

CONTENTS

1. SAFETY INFORMATION	2	5. DISASSEMBLY	38
2. EXPLODED VIEWS, PACKING AND PARTS LIST	3	6. IC INFORMATION	39
3. SCHEMATIC DIAGRAM AND P.C.BOARDS CONNECTION DIAGRAM	7	7. FOR A-P710/HB AND A-P510/HB TYPES	40
4. PCB 's PARTS LIST	31	8. PANEL FACILITIES	41
		9. SPECIFICATIONS	44

PIONEER ELECTRONIC CORPORATION 4-1, Meguro 1-Chome, Meguro-ku, Tokyo 153, Japan

PIONEER ELECTRONICS SERVICE INC. P.O. Box 1760, Long Beach, California 90801 U.S.A.

PIONEER ELECTRONICS OF CANADA, INC. 505 Cochrane Drive, Markham, Ontario L3R 8E3 Canada

PIONEER ELECTRONIC [EUROPE] N.V. Keetberglaan 1, 2740 Beveren, Belgium

PIONEER ELECTRONICS AUSTRALIA PTY. LTD. 178-184 Boundary Road, Braeside, Victoria 3195, Australia TEL: [03] 580-9911

© PIONEER ELECTRONIC CORPORATION 1991

YV FEB. 1991 Printed in Japan.

This service manual is intended for qualified service technicians; it is not meant for the casual do-it-yourselfer. Qualified technicians have the necessary test equipment and tools, and have been trained to properly and safely repair complex products such as those covered by this manual.

Improperly performed repairs can adversely affect the safety and reliability of the product and may void the warranty. If you are not qualified to perform the repair of this product properly and safely, you should not risk trying to do so and refer the repair to a qualified service technician.

WARNING

Lead in solder used in this product is listed by the California Health and Welfare agency as a known reproductive toxicant which may cause birth defects or other reproductive harm (California Health & Safety Code, Section 25249.5).

When servicing or handling circuit boards and other components which contain lead in solder, avoid unprotected skin contact with the solder. Also, when soldering do not inhale any smoke or fumes produced.

1. SAFETY INFORMATION


(FOR USA MODEL ONLY)

1. SAFETY PRECAUTIONS

The following check should be performed for the continued protection of the customer and service technician.

LEAKAGE CURRENT CHECK

Measure leakage current to a known earth ground (water pipe, conduit, etc.) by connecting a leakage current tester such as Simpson Model 229-2 or equivalent between the earth ground and all exposed metal parts of the appliance (input/output terminals, screwheads, metal overlays, control shaft, etc.). Plug the AC line cord of the appliance directly into a 120V AC 60Hz outlet and turn the AC power switch on. Any current measured must not exceed 0.5mA.

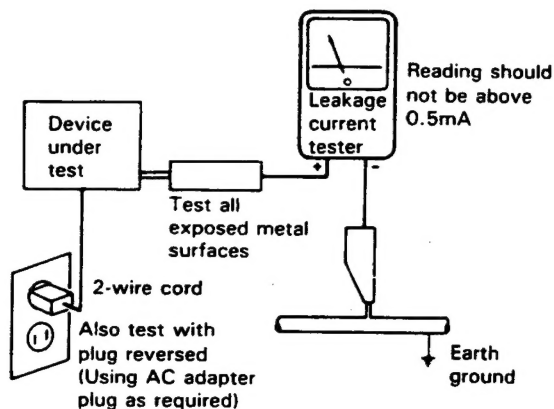

AC Leakage Test

ANY MEASUREMENTS NOT WITHIN THE LIMITS OUTLINED ABOVE ARE INDICATIVE OF A POTENTIAL SHOCK HAZARD AND MUST BE CORRECTED BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

2. PRODUCT SAFETY NOTICE

Many electrical and mechanical parts in the appliance have special safety related characteristics. These are often not evident from visual inspection nor the protection afforded by them necessarily can be obtained by using replacement components rated for voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in this Service Manual.

Electrical components having such features are identified by marking with a Δ on the schematics and on the parts list in this Service Manual.

The use of a substitute replacement component which does not have the same safety characteristics as the PIONEER recommended replacement one, shown in the parts list in this Service Manual, may create shock, fire, or other hazards.

Product Safety is continuously under review and new instructions are issued from time to time. For the latest information, always consult the current PIONEER Service Manual. A subscription to, or additional copies of, PIONEER Service Manual may be obtained at a nominal charge from PIONEER.

2. EXPLODED VIEWS, PACKING AND PARTS LIST

NOTES:

- Parts without part number cannot be supplied.
- The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designa-
- Parts marked by "©" are not always kept in stock. Their delivery time may be longer than usual or they may be unavailable.


2.1 PARTS LIST OF EXTERIOR AND PACKING (A – P710/HE)

Mark	No.	Description	Parts No.	Mark	No.	Description	Parts No.
	1	VOLUME KNOB	AAB1181		36	INSULATOR ASSEMBLY	AMR2148
	2	KNOB (MIC LEVEL)	AAB1190		37	CHASSIS	
	3	A/M BUTTON (VOCAL CANCEL)	AAD1841		38	REAR PANEL	
	4	AI BUTTON (SMART OPERATION)	AAD1843		39	BONNET (FE)	ANE1260
	5	P/P BUTTON (SURROUND/PILLOW, P.BASS, POWER)	AAD1844		40	PACK HOLDER	
	6	FUNCTION BUTTON (INPUT SELECTOR, MEMORY)	AAD1980		41	HEAT SINK HOLDER	
	7	FUNCTION LENS	AAK2007		42	HOLDER (JACK)	
	8	INDICATOR LENS	AAK2008		43	HOLDER (FAN)	
	9	FILTER (REMOTE SENSOR)	AAK2010		44	HEAT SINK	
	10	MIC AMP ASSEMBLY			45	TRANS PRIMARY ASSEMBLY	
©	11	DISPLAY ASSEMBLY	AWZ3136		46	VOLUME ASSEMBLY	
	12	SP TERMINAL ASSEMBLY			47	DC MOTOR	AXM1009
	13	TRANS CONNECT ASSEMBLY			48	SCREW	BBZ26P100FMC
©	14	FUNCTION ASSEMBLY	AWZ3377		49	SCREW	BBZ30P060FZK
	15	H.P. ASSEMBLY			50	SCREW	BBZ30P080FZK
	16	SCREW	ABA-222		51	SCREW	BPZ26P080FMC
	17	SCREW	ABA1018		52	NUT	NK90FUC
	18	SCREW	ABA1024		53	FOOT (RUBBER)	REC-434
	19	SCREW	ABA1056		54	CKA (0.01/AC400V, C1)	ACG1003
	20	SCREW	ABA1074		55	FUSE (T1.25A, FU1)	AEK-510
	21	SCREW (STEEL)	ABA1095		56	FUSE (T2.5A, FU2)	AEK-509
Δ	22	WASHER	ABE1020		57	FUSE (T2A, FU3)	AEK-017
	23	AC POWER CORD	ADG1019		58	FUSE (T2A, FU4)	AEK-017
	24	CUSHION (RUBBER)			59	FUSE (T2.5A, FU5)	AEK-403
	25	NYLON BINDER			60	FUSE (T2.5A, FU6)	AEK-403
	26	COVER (CAPACITOR)			61	POWER TRANSFORMER (T1)	ATS1332
	27	STRAIN RELIEF	AEC-882		62	TRANS COVER ASSEMBLY	
	28	PCB SPACER					
	29	SPACER					
©	30	AF ASSEMBLY	AWZ3385				
	31	FRONT PAD	AHA1325				
	32	REAR PAD	AHA1326				
	33	PACKING SHEET	AHG1175				
	34	FRONT PANEL ASSEMBLY	AMB1785				
	35	PCB MOULD					

2.2 PARTS LIST OF EXTERIOR AND PACKING (A – P510/HE)

Mark	No.	Description	Parts No.	Mark	No.	Description	Parts No.
	1	VOLUME KNOB	AAB1181		46	VOLUME ASSEMBLY	
	2			47	DC MOTOR	AXM1009
	3	A/M BUTTON (MEMORY)	AAD1840		48	SCREW	BBZ26P100FMC
	4	AI BUTTON (SMART OPERATION)	AAD1842		49	SCREW	BBZ30P060FZK
	5	P/P BUTTON SURROUND & STEREO WIDE, POWER)	AAD1844		50	SCREW	BBZ30P080FZK
	6	FUNCTION BUTTON (INPUT SELECTOR)	AAD1979		51	SCREW	BPZ26P080FMC
	7	FUNCTION LENS	AAK2006		52	NUT	NK90FUC
	8	INDICATOR LENS	AAK2008		53	FOOT (RUBBER)	REC-434
	9	FILTER (REMOTE SENSOR)	AAK2010		54	CKA (0.01/AC400V, C1)	ACG1003
	10			55	FUSE (T1.25A, FU1)	AEK-510
©	11	DISPLAY ASSEMBLY	AWZ3135		56	FUSE (T2.5A, FU2)	AEK-509
	12	SP TERMINAL ASSEMBLY			57	FUSE (T2A, FU3)	AEK-017
	13	TRANS CONNECT ASSEMBLY			58	FUSE (T2A, FU4)	AEK-017
©	14	FUNCTION ASSEMBLY	AWZ3375		59	FUSE (T2.5A, FU5)	AEK-403
	15	H.P. ASSEMBLY			60	FUSE (T2.5A, FU6)	AEK-403
	16	SCREW	ABA-222		61	POWER TRANSFORMER (T1)	ATS1331
	17	SCREW	ABA1018		62	TRANS COVER ASSEMBLY	
	18	SCREW	ABA1024				
	19	SCREW	ABA1056				
	20	SCREW	ABA1074				
	21	SCREW (STEEL)	ABA1095				
	22	WASHER	ABE1020				
Δ	23	AC POWER CORD	ADG1019				
	24	CUSHION (RUBBER)					
	25	NYLON BINDER					
	26	COVER (CAPACITOR)					
	27	STRAIN RELIEF	AEC-882				
	28	PCB SPACER					
	29	SPACER					
©	30	AF ASSEMBLY	AWZ3383				
	31	FRONT PAD	AHA1325				
	32	REAR PAD	AHA1326				
	33	PACKING SHEET	AHG1175				
	34	FRONT PANEL ASSEMBLY	AMB1781				
	35	PCB MOULD					
	36	INSULATOR ASSEMBLY	AMR2148				
	37	CHASSIS					
	38	REAR PANEL					
	39	BONNET (FE)	ANE1260				
	40	PACK HOLDER					
	41	HEAT SINK HOLDER					
	42					
	43	HOLDER (FAN)					
	44	HEAT SINK					
	45	TRANS PRIMARY ASSEMBLY					

• Packing

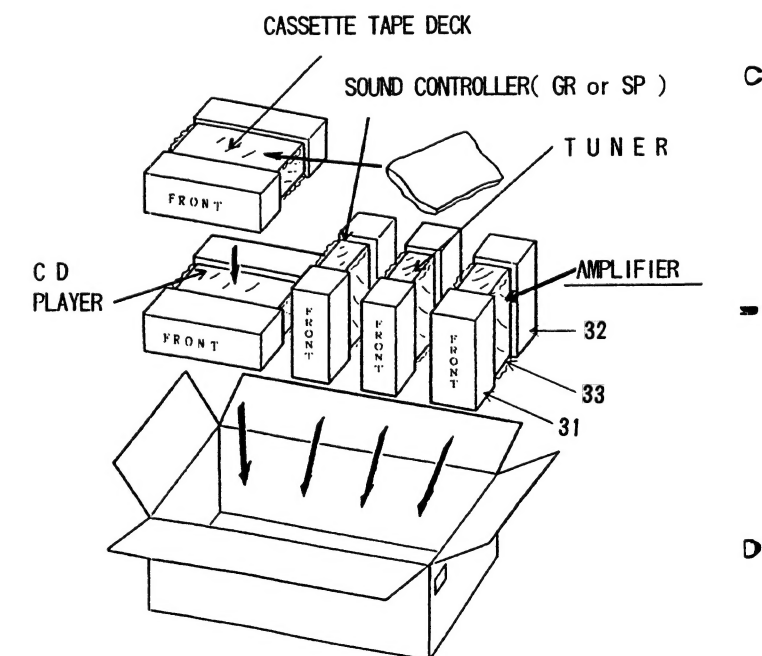

A-P710, A-P510

• Exterior

Parts No.

AXM1009
BBZ26P100FMC
BBZ30P060FZK
BBZ30P080FZK

BPZ26P080FMC
NK90FUC
REC-434
ACG1003
AEK-510


AEK-509
AEK-017
AEK-017
AEK-403
AEK-403

ATS1331

ER(GR or SP)

TUNER

AMPLIFIER

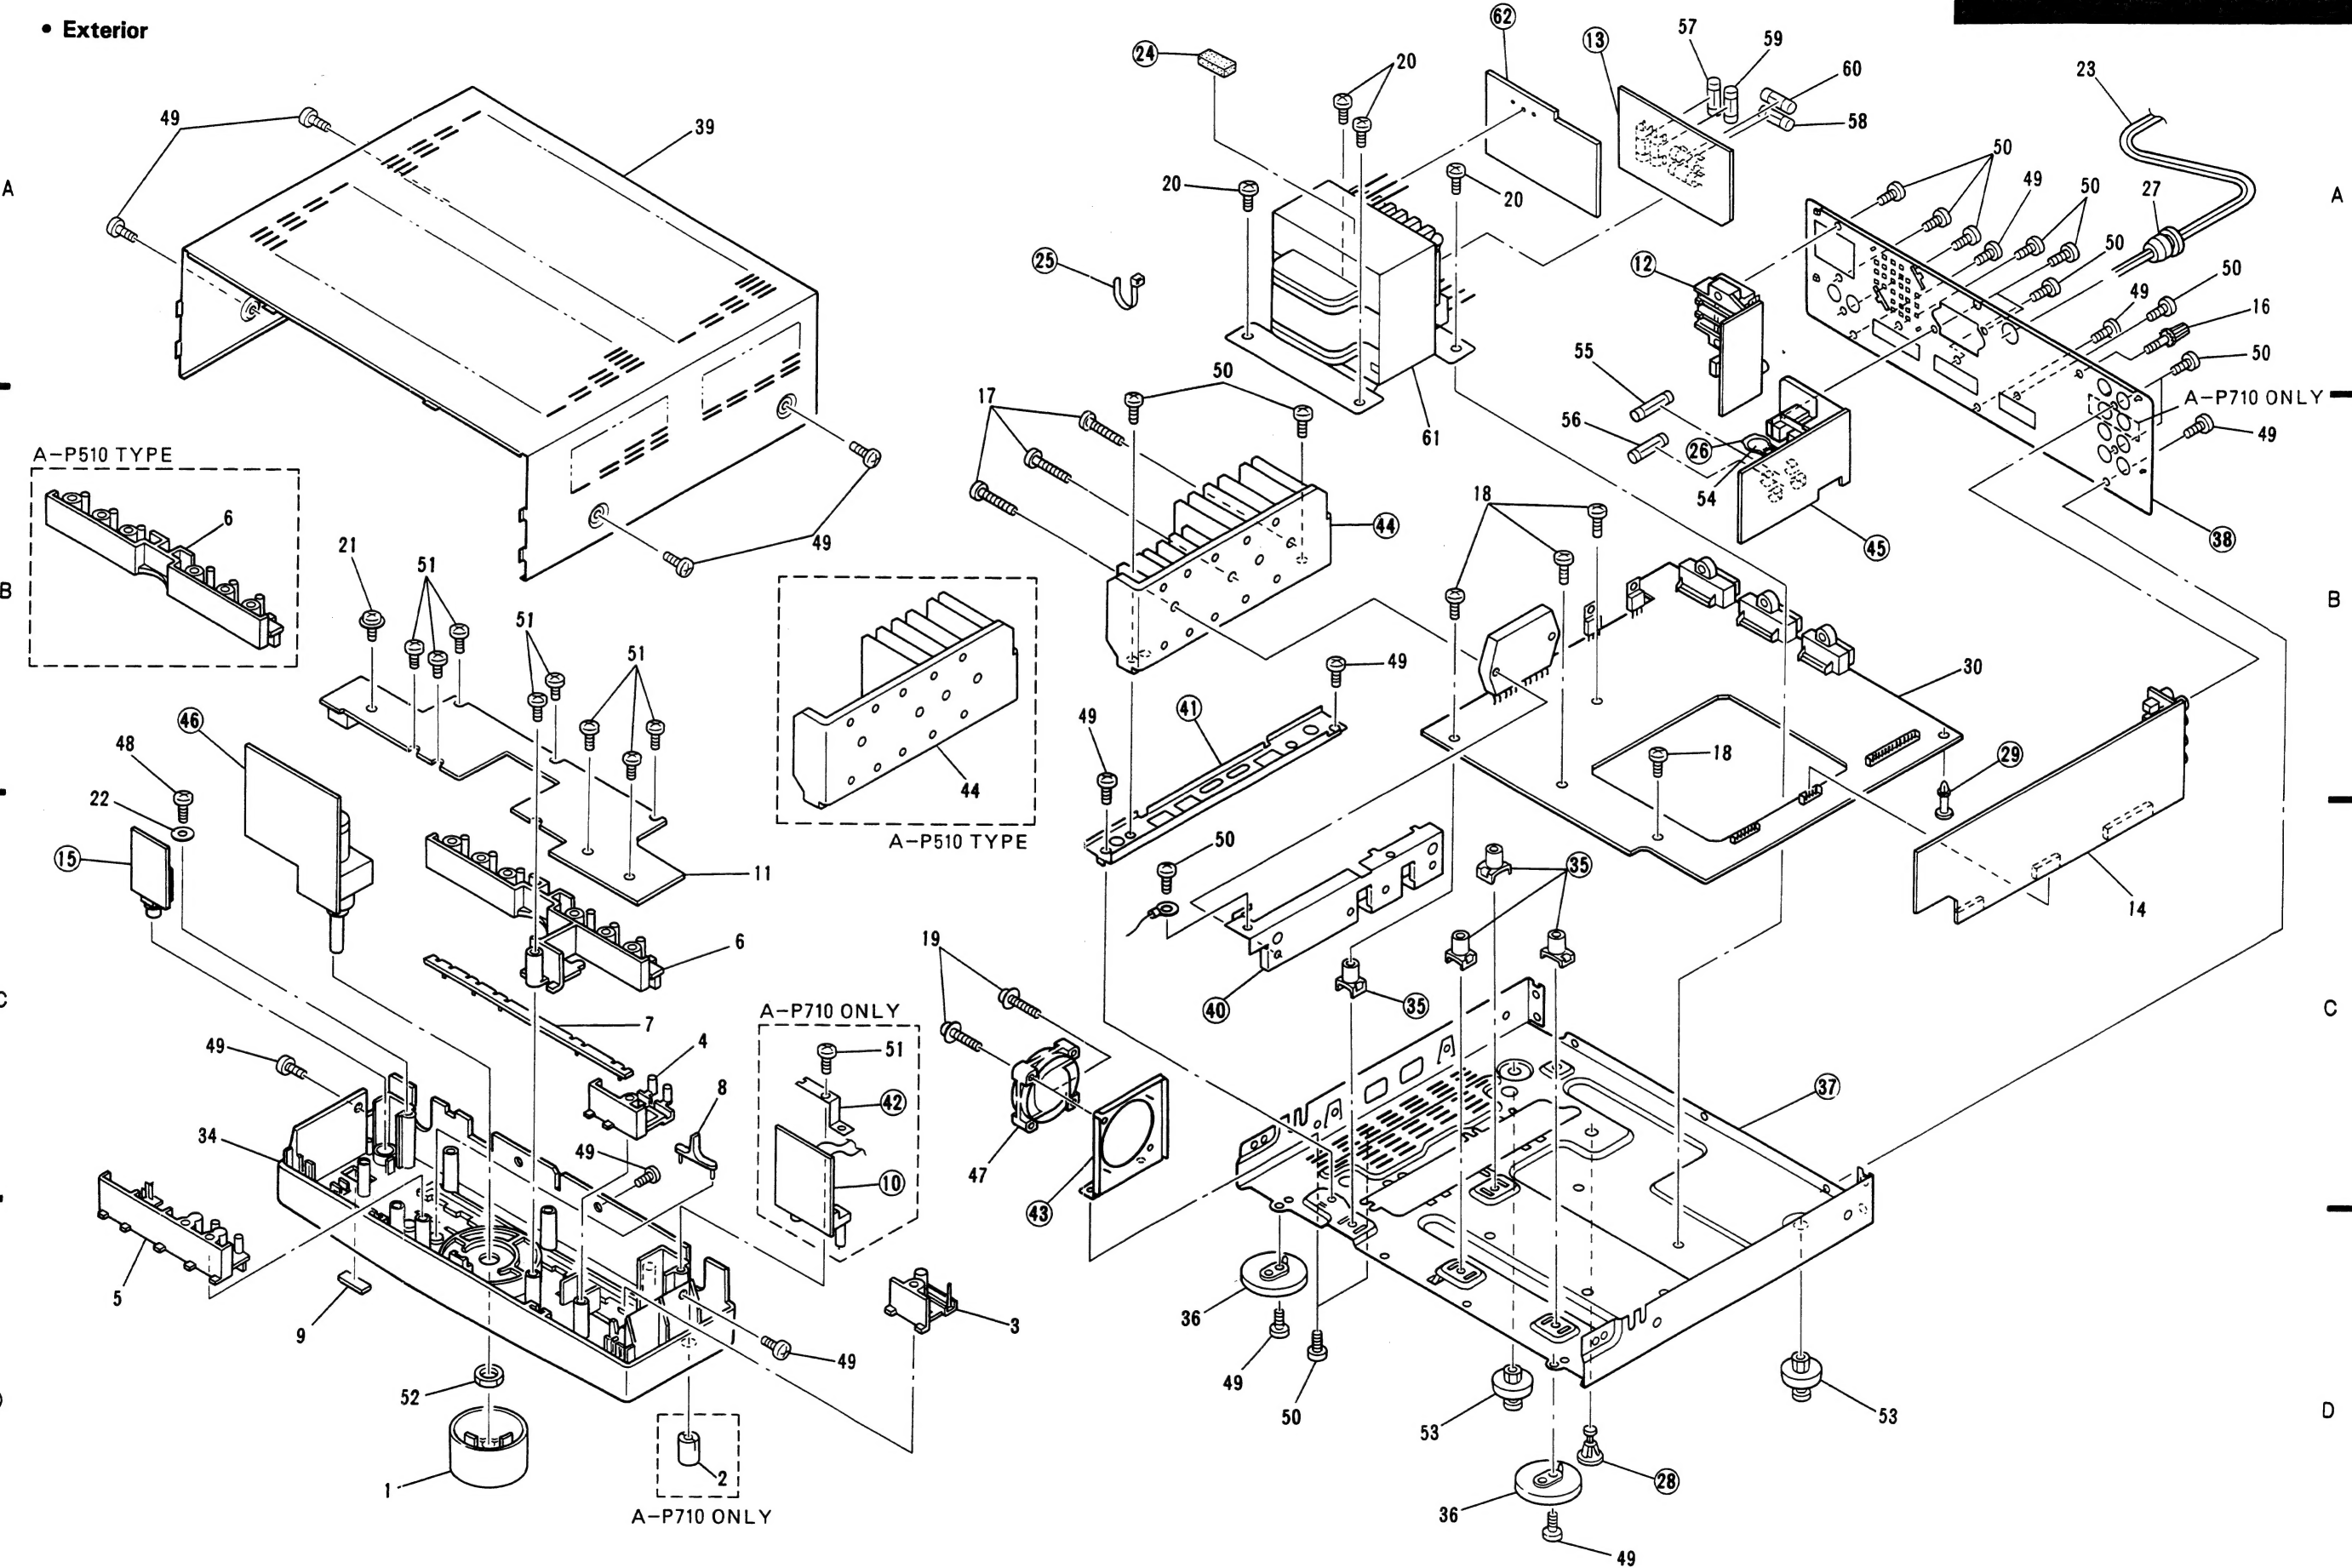

A-P510 TYPE


A-P510 TYPE


A-P710 ONLY

A-P710 ONLY

A-P710 ONLY

3. SCHEMATIC DIAGRAM AND P.C.BOARDS CONNECTION DIAGRAM

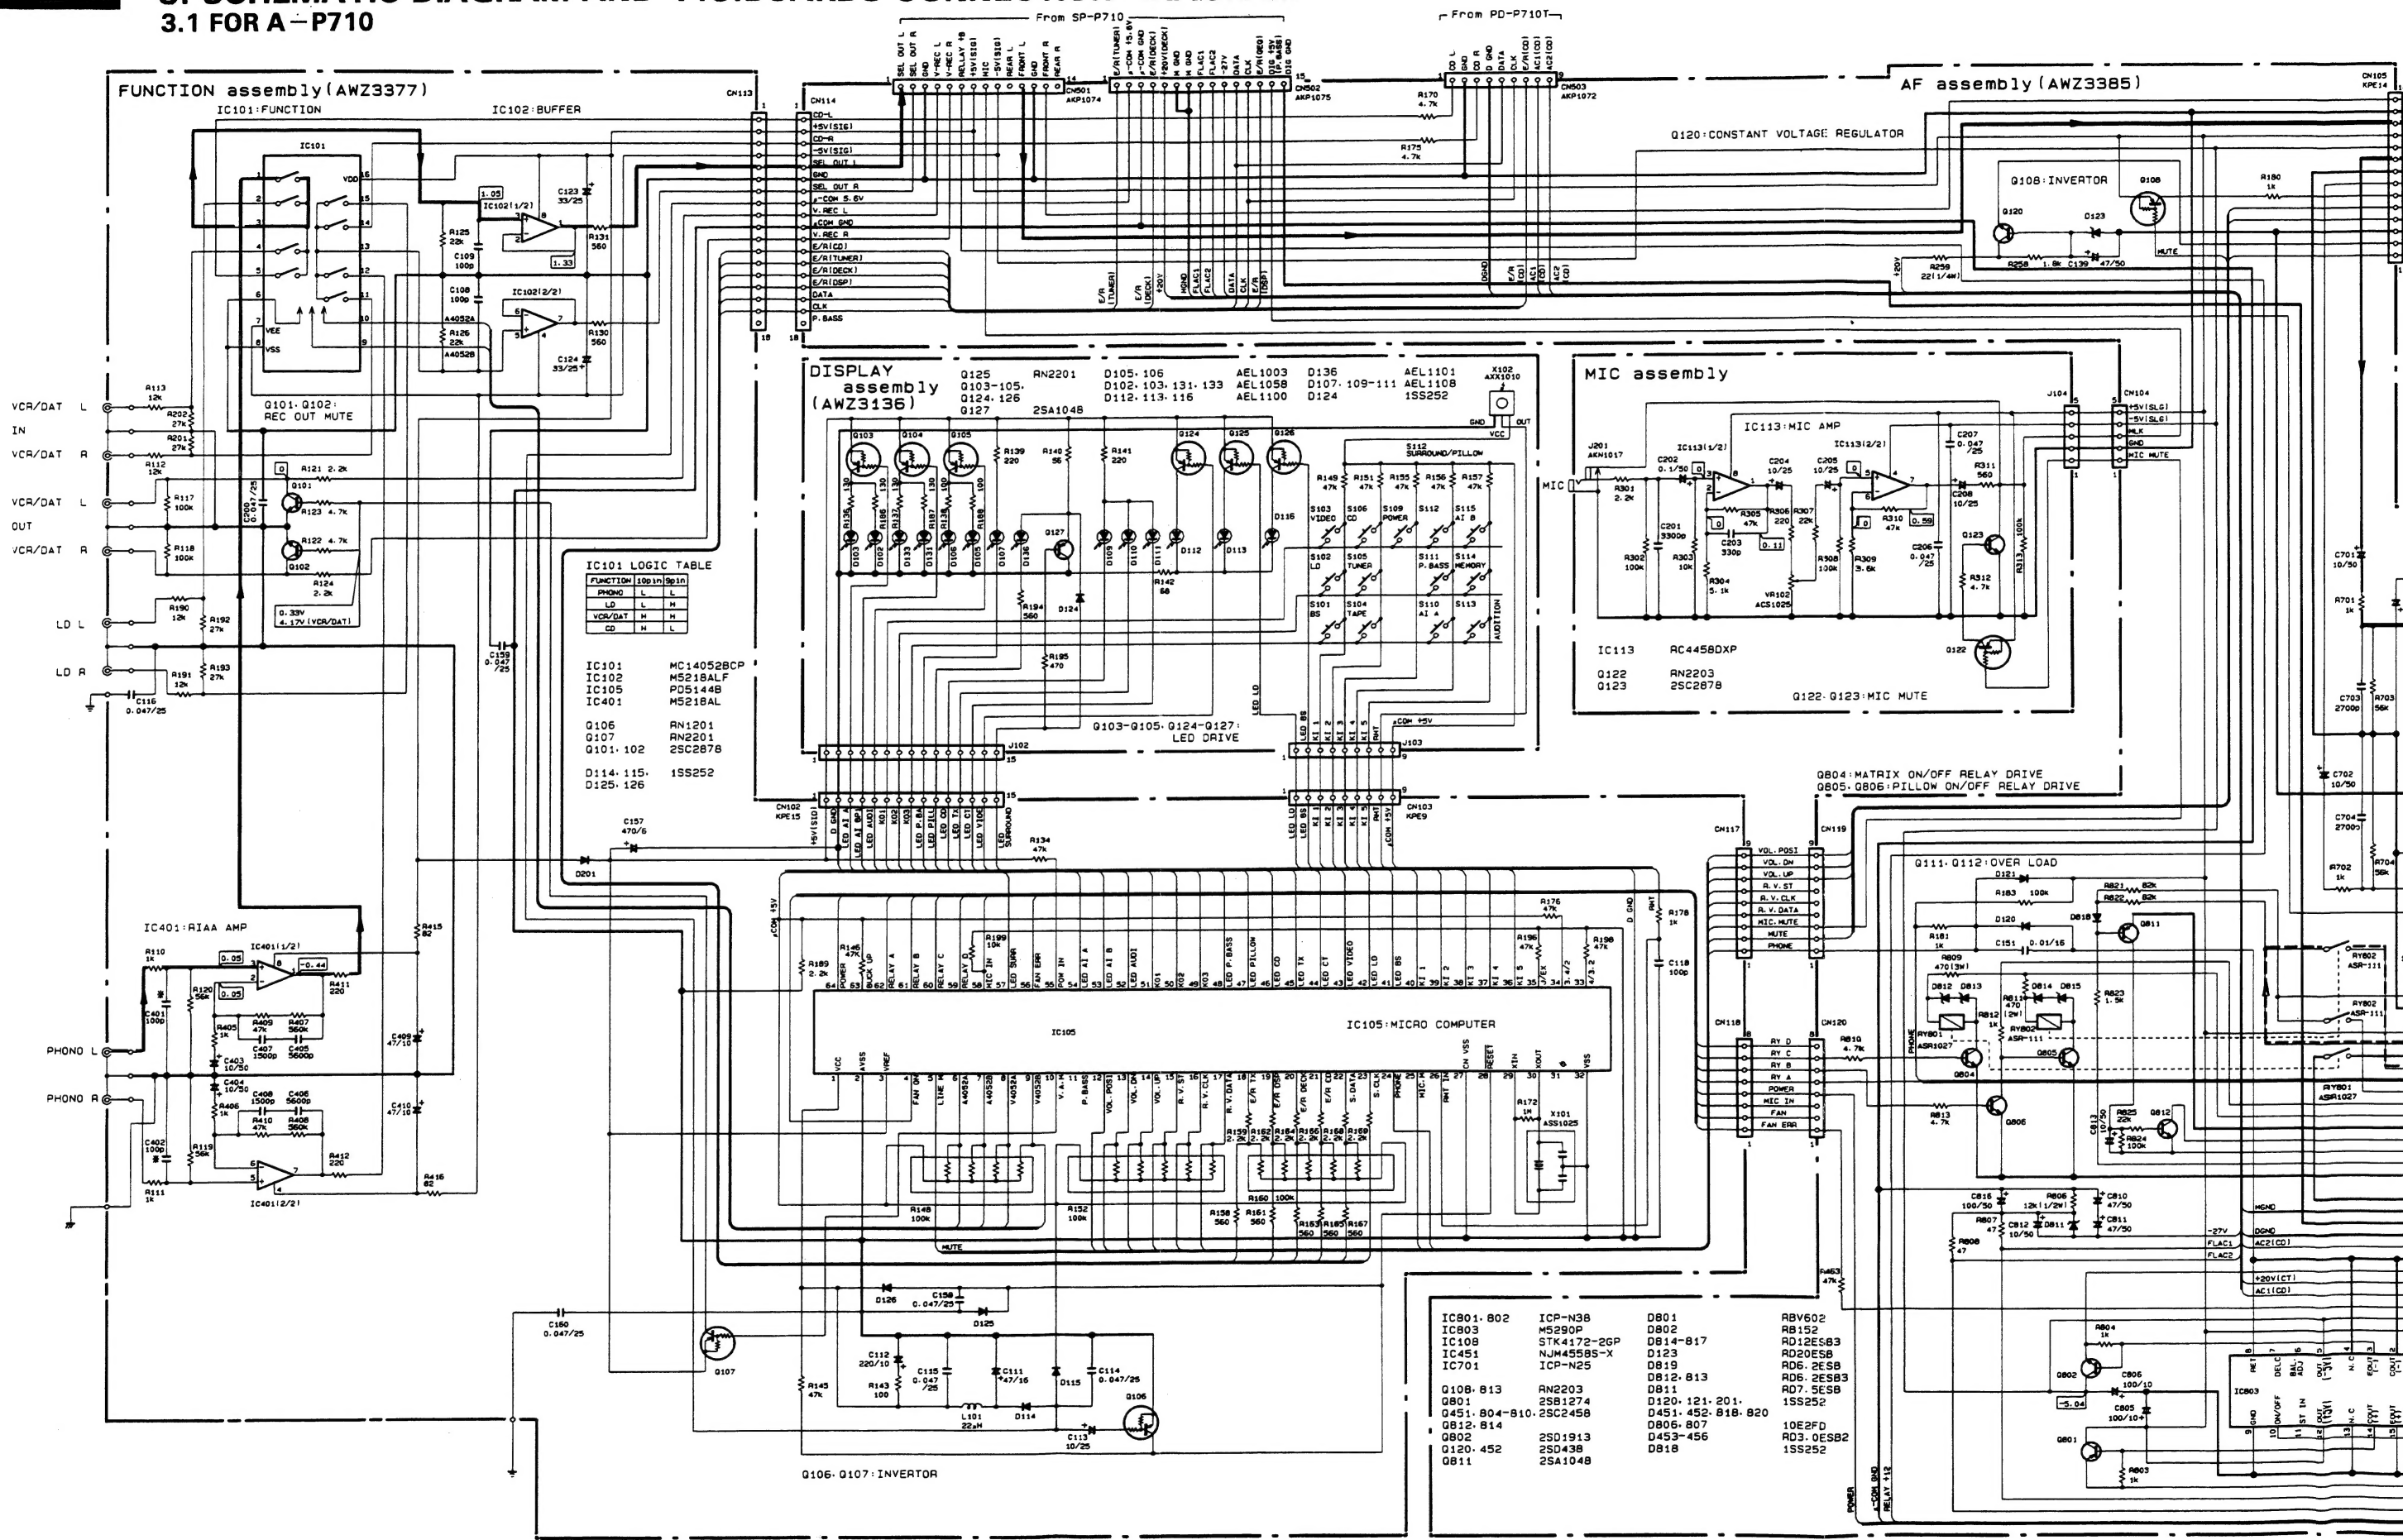

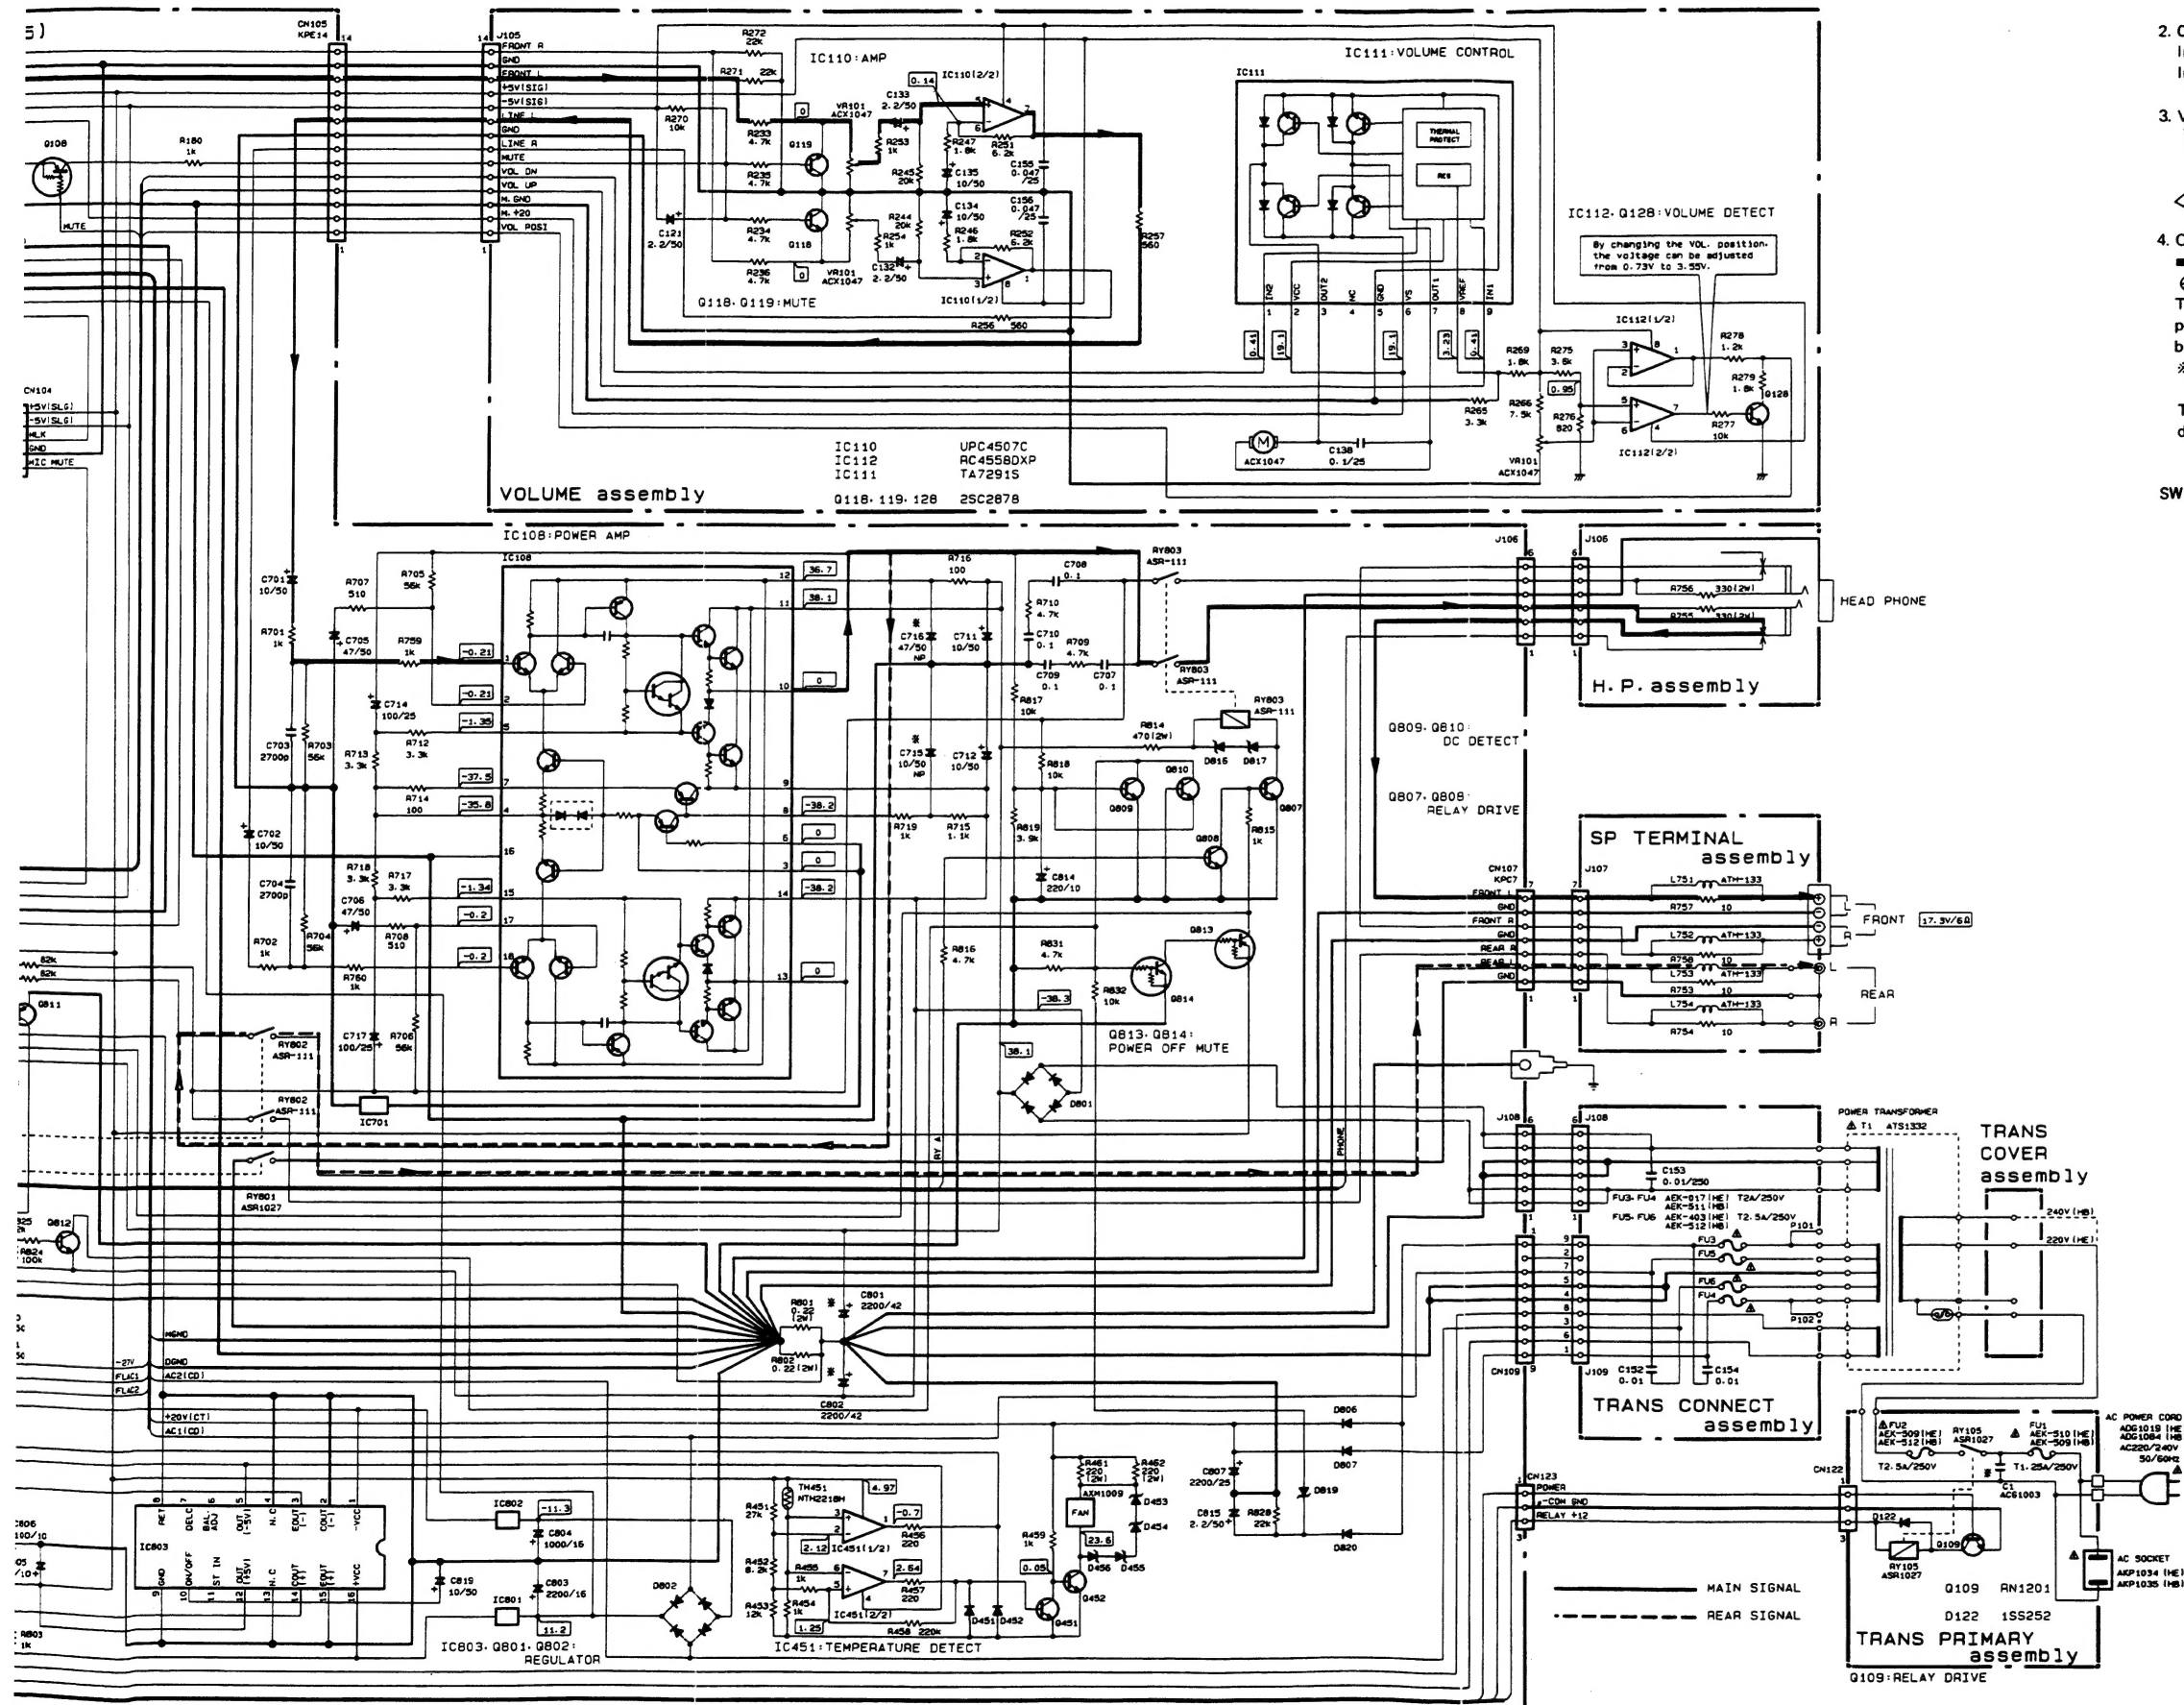

1. RESISTORS:
Indicated in Ω , $\frac{1}{4}W$, $\frac{1}{2}W$, $\pm 5\%$ tolerance unless otherwise noted k: k Ω ,
M: M Ω , (F): $\pm 1\%$, (G): $\pm 2\%$, (K): $\pm 10\%$ (M): $\pm 20\%$ tolerance

2. CAPACITORS:
Indicated in capacity (μF)/voltage (V) unless otherwise noted p: pF
Indication without voltage is 50V except electrolytic capacitor.

3. VOLTAGE, CURRENT:
Signal voltage at (40V + 40W 8 Ω) output, DIN(1kHz). A
DC voltage (V) at no input signal
Value in () is DC voltage at rated power.
mA: DC current at no input signal

4. OTHERS:
Signal route.
Adjusting point.
The mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
marked capacitors and resistors have parts numbers.

This is the basic schematic diagram, but the actual circuit may vary due to improvements in design.

SWITCHES:

DISPLAY assembly

- S101 PHONO
- S102 LD
- S103 VIDEO
- S104 TAPE
- S105 TUNER
- S106 CD
- S109 POWER
- S110 AI A
- S111 P-BASS
- S112 SURROUND
- S113 AUDITION
- S114 MEMORY
- S115 AI B

Line Voltage Selection (For HE, HB and HEWZIW types)

Line voltage can be changed with following steps.







1. Disconnect the AC power cord.
2. Remove the Bonnet case.
3. Change the connection of the power transformer lead wire.
4. Stick the line voltage label on the rear panel.

Part No.	Description
AAX-193	220V label
AAX-192	240V label
---	220V
---	240V


B

C

D

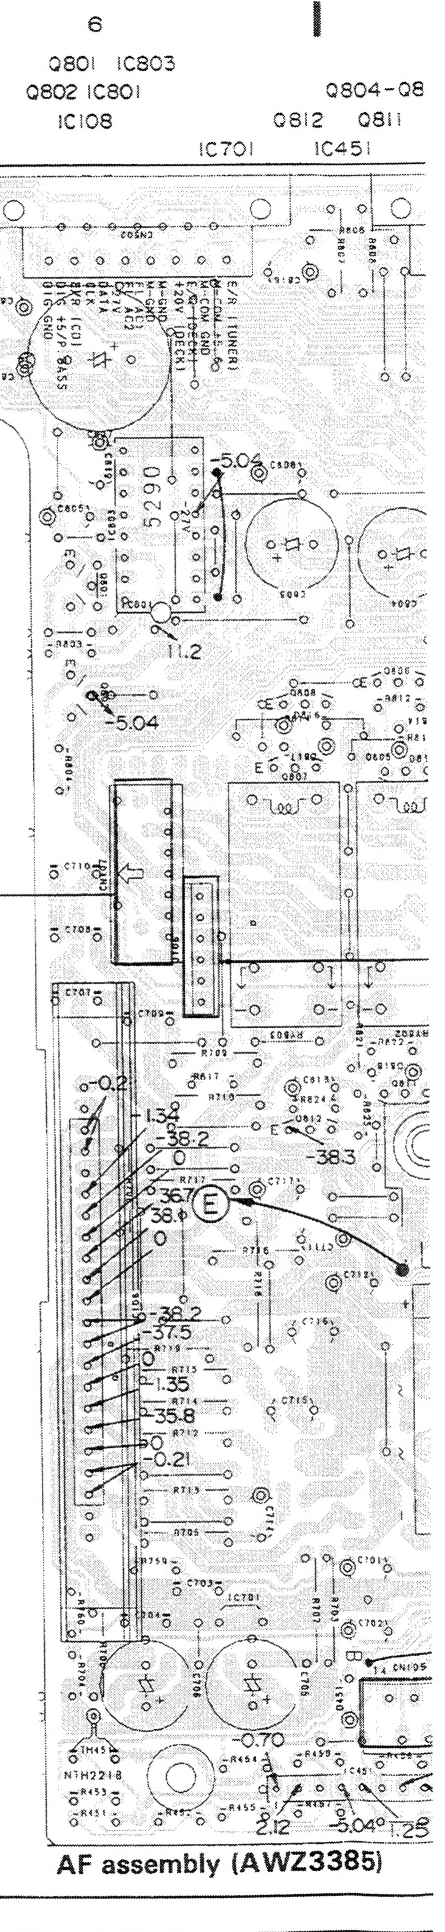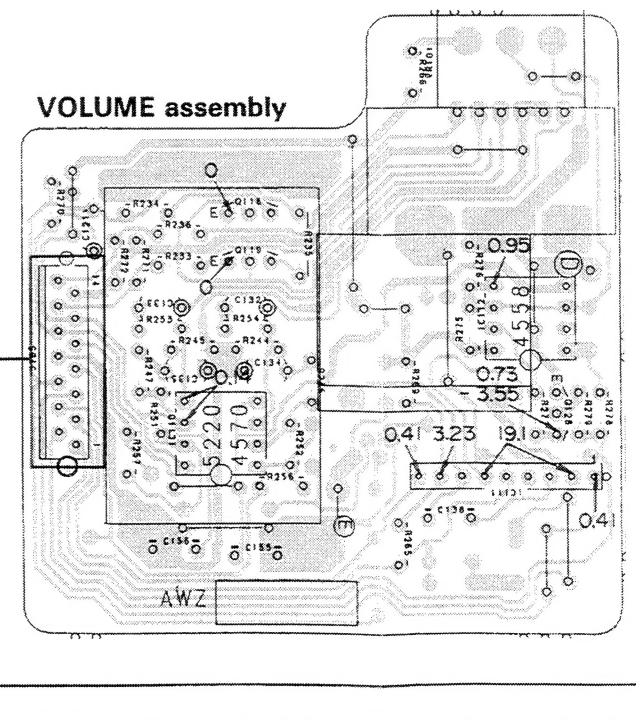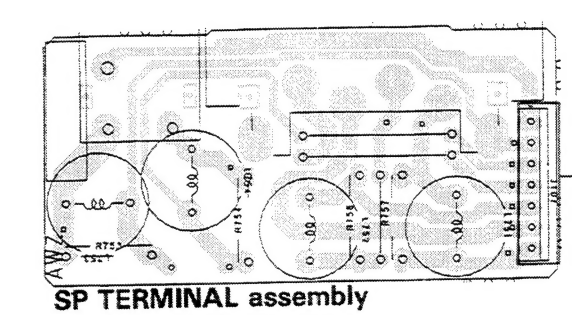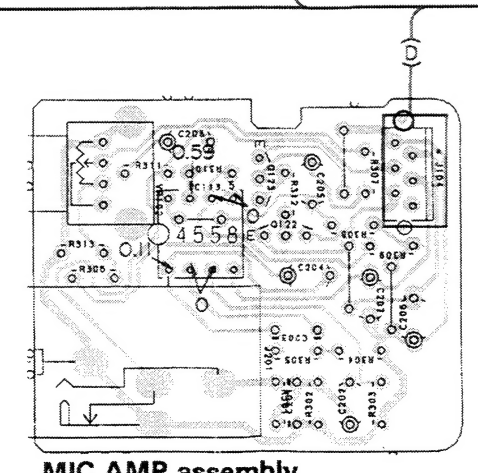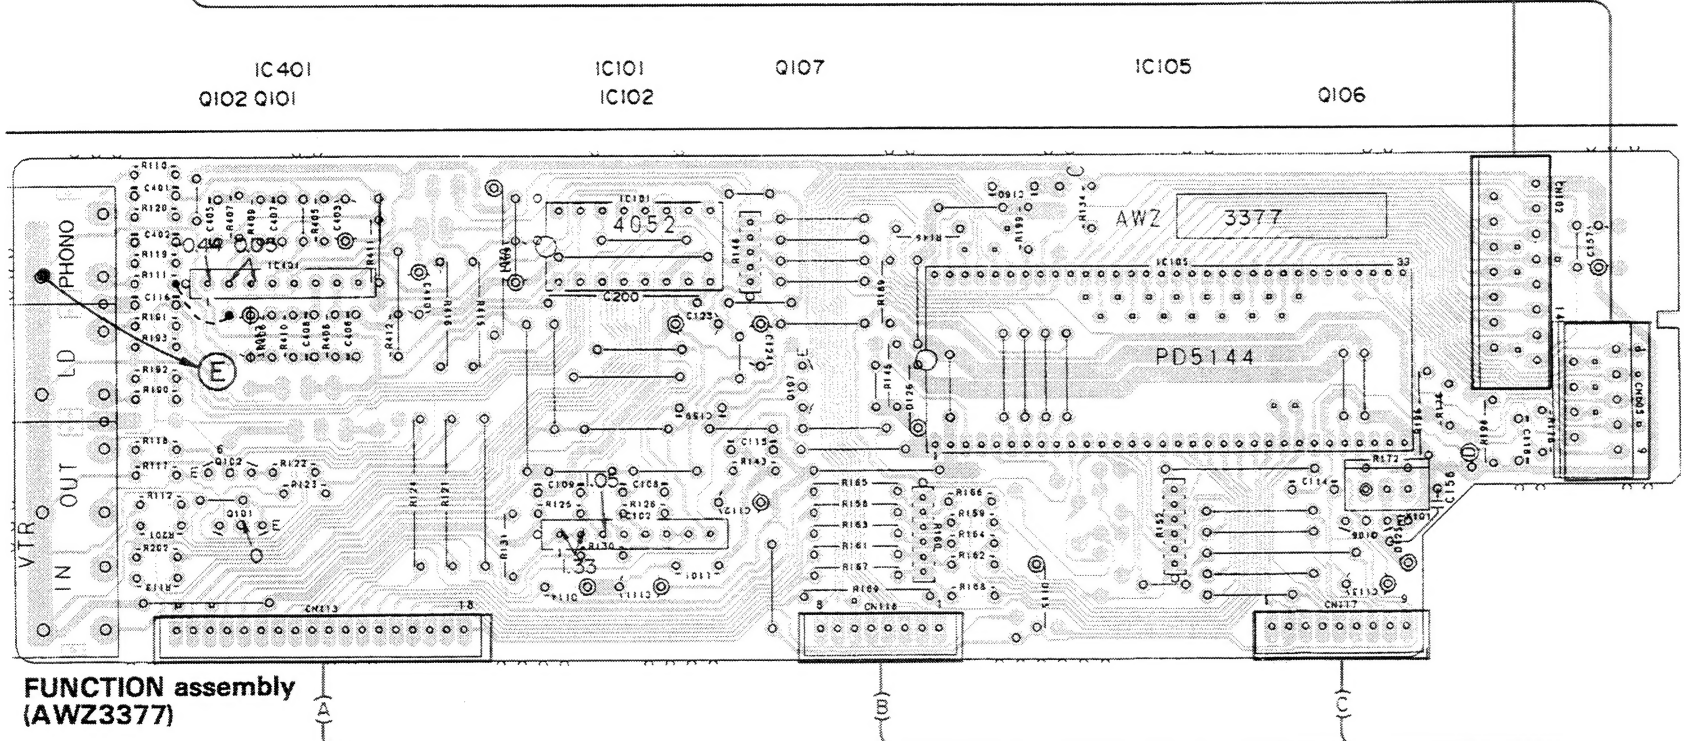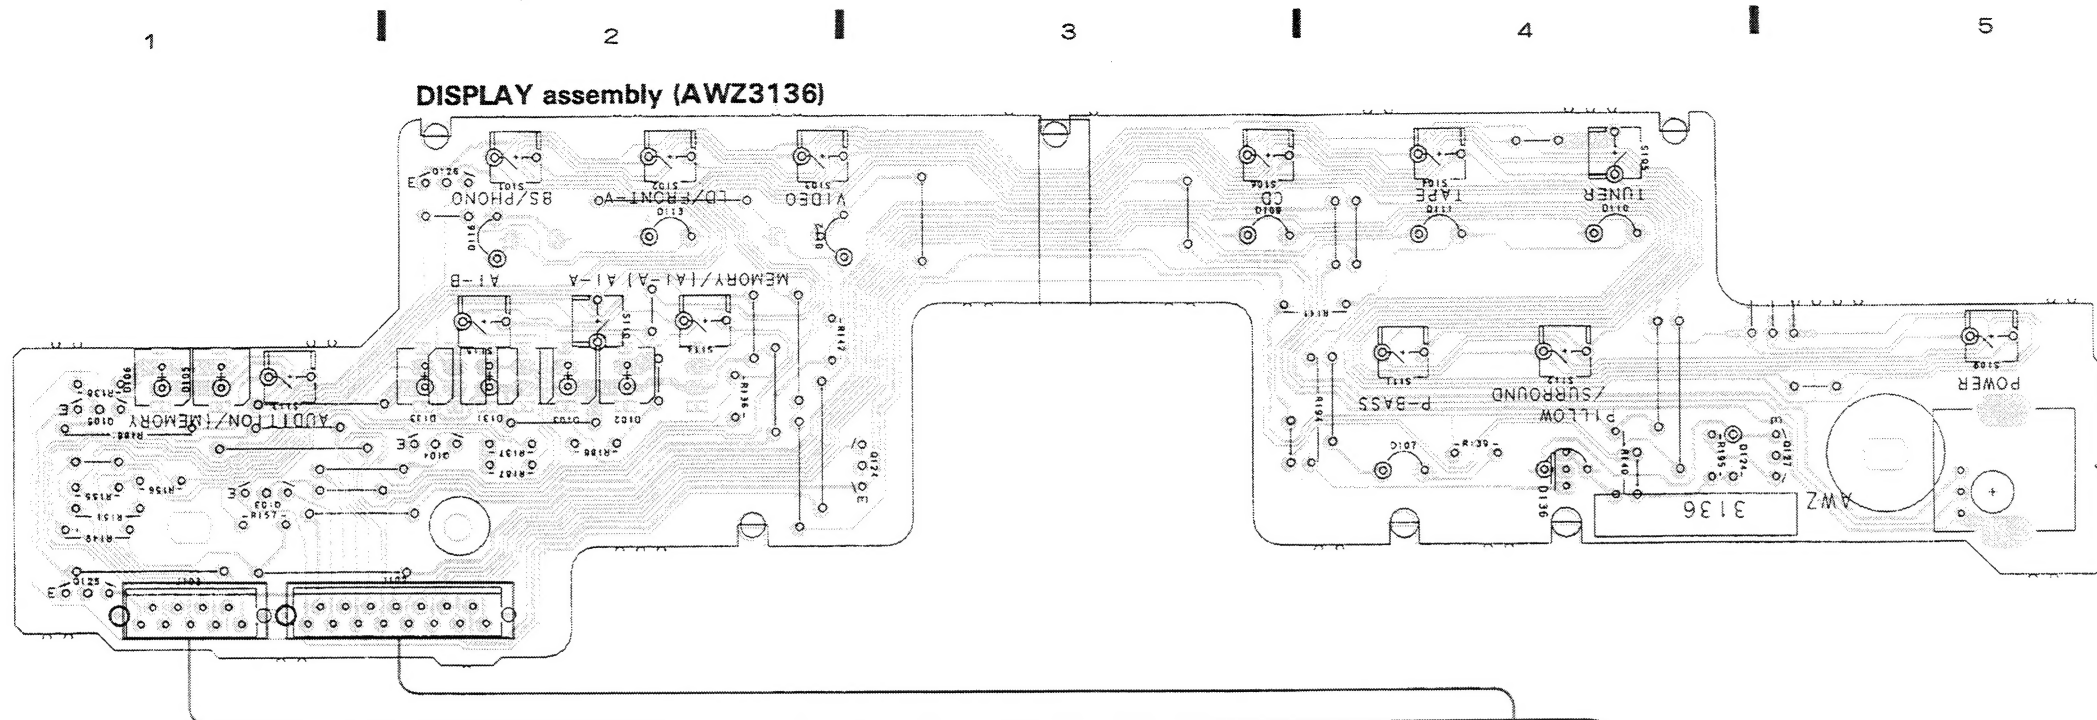

6
01 IC803
IC801
108
Q804-Q808
Q812 Q811
IC701 IC451 Q810 Q809 Q120 Q108 Q452 Q451 Q813 Q814

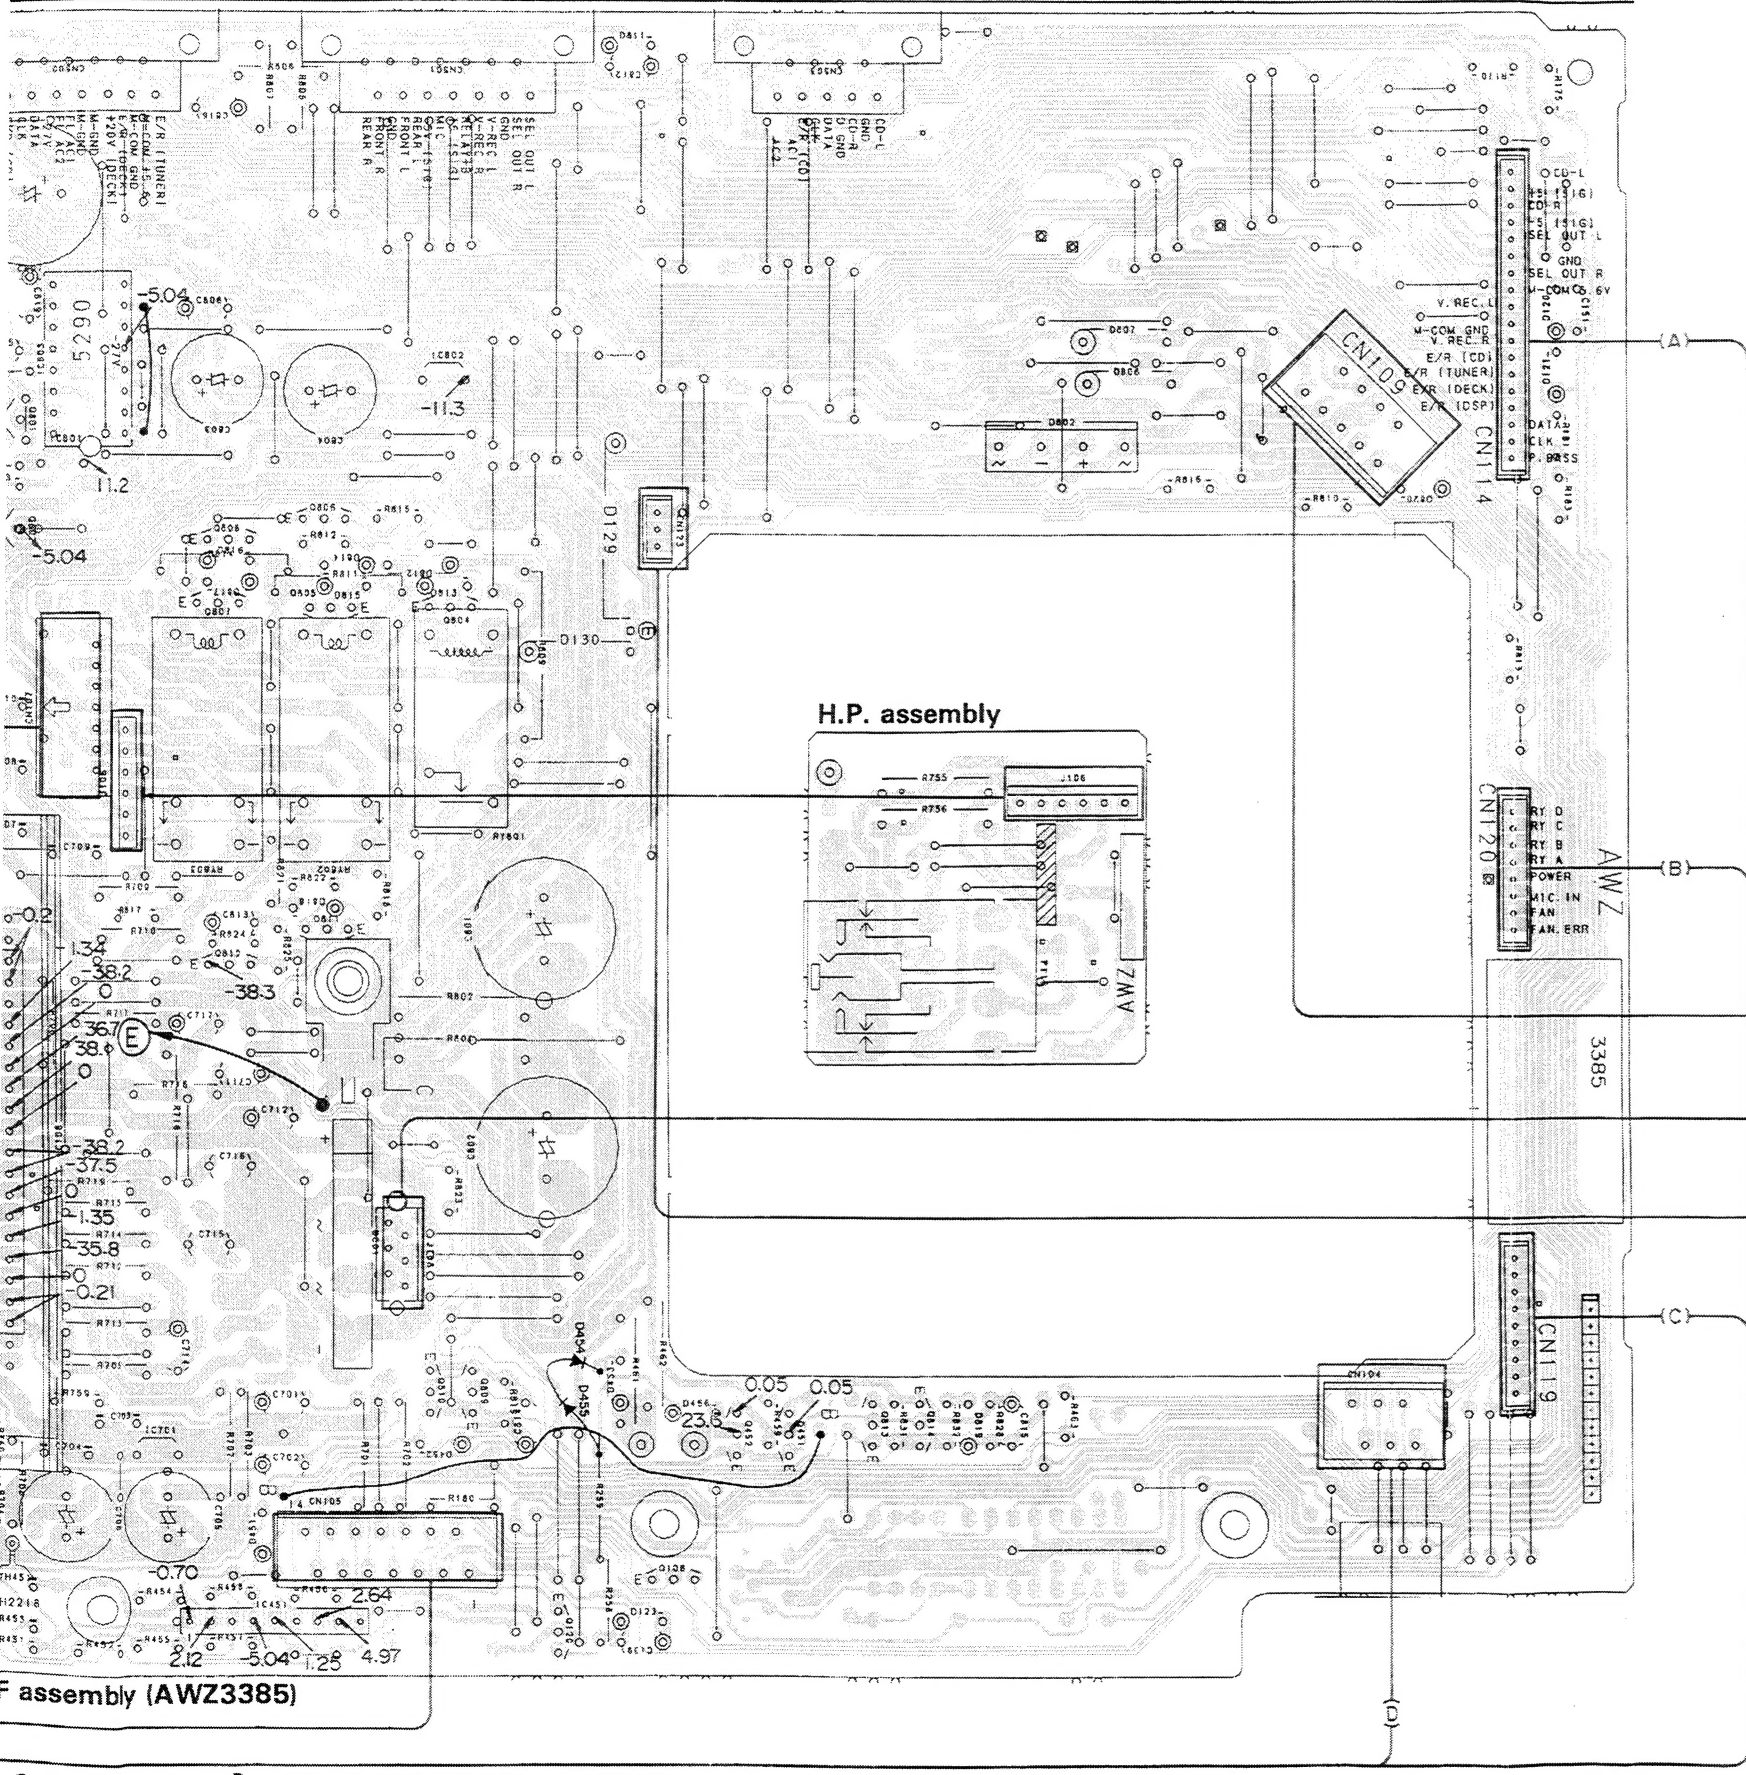

F assembly (AWZ3385)


10
NOTE
1. This P.C.B. connection diagram is viewed from the parts mounted side.
2. The parts which have been mounted on the board can be replaced with those shown with the corresponding wiring symbols listed in the following Table.

P.C.B. pattern diagram indication	Corresponding part symbol	Part Name
		Transistor
		Radiator type transistor
		Diode
		Resistor
		Capacitor (Polarity)
		Capacitor (Non-polarity)

P.C.B. pattern diagram indication	Part Name
IC	IC
S	Switch
RY	Relay
L	Coil
F	Filter
VR	Variable resistor or Semi-fixed resistor


- Others
3. The capacitor terminal marked with @ (double circles) shows negative terminal.
4. The diode terminal marked with @ (double circles) shows cathode side.
5. The transistor terminal to which E is affixed shows the emitter.

TRANS CONNECT assembly

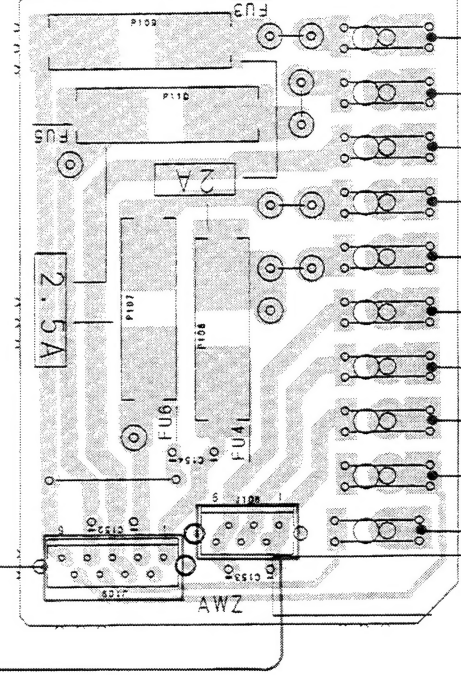


POWER TRANSFORMER

TRANS COVER assembly

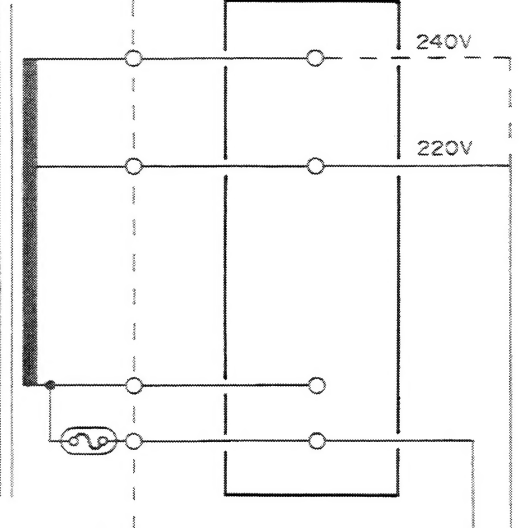

TRANS PRIMARY assembly

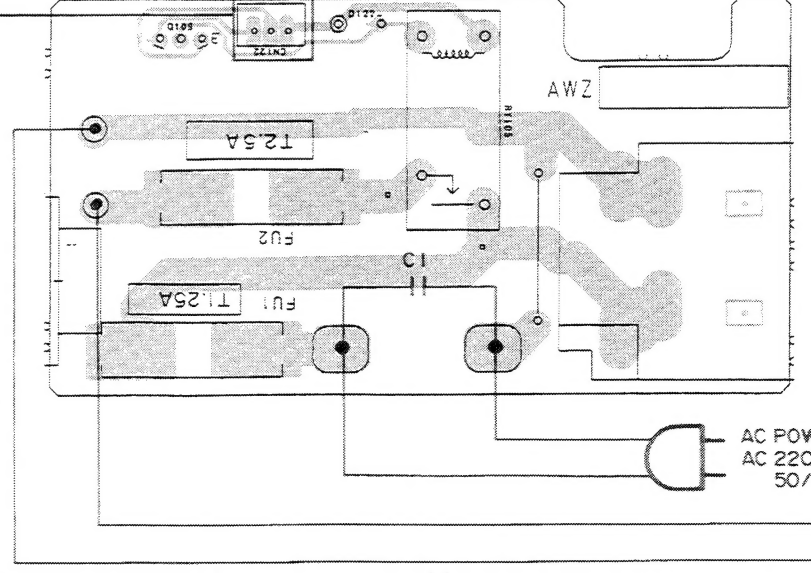



AC POWER CORD
AC 220/240V
50/60Hz

A

B

C

D

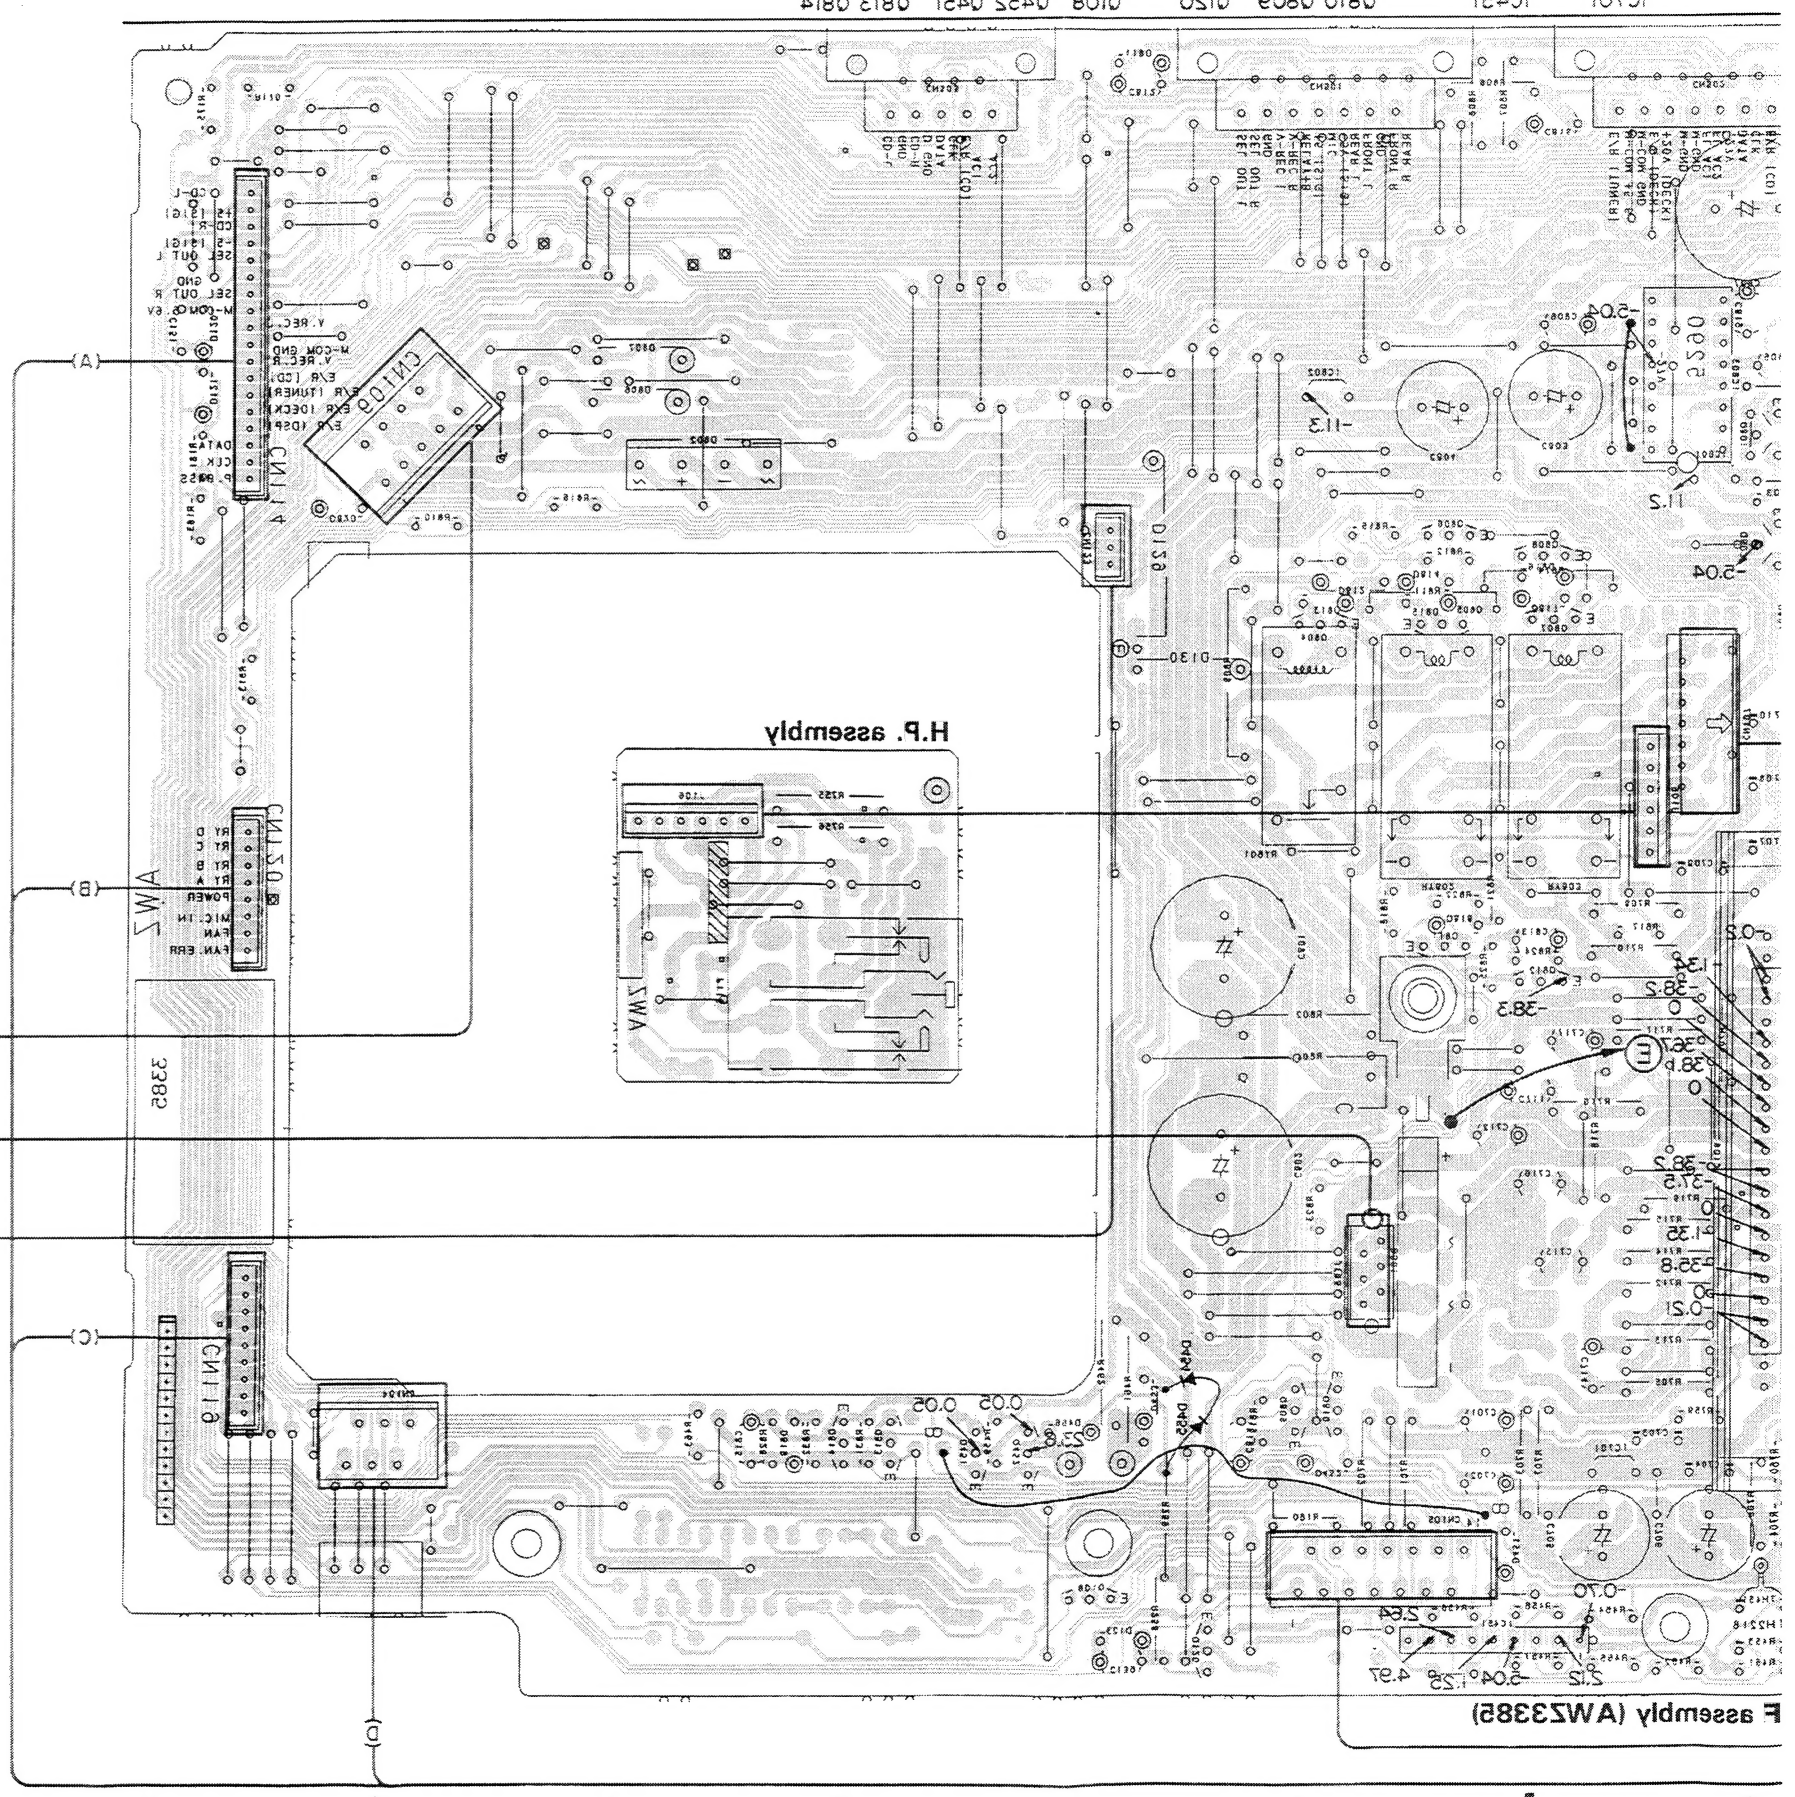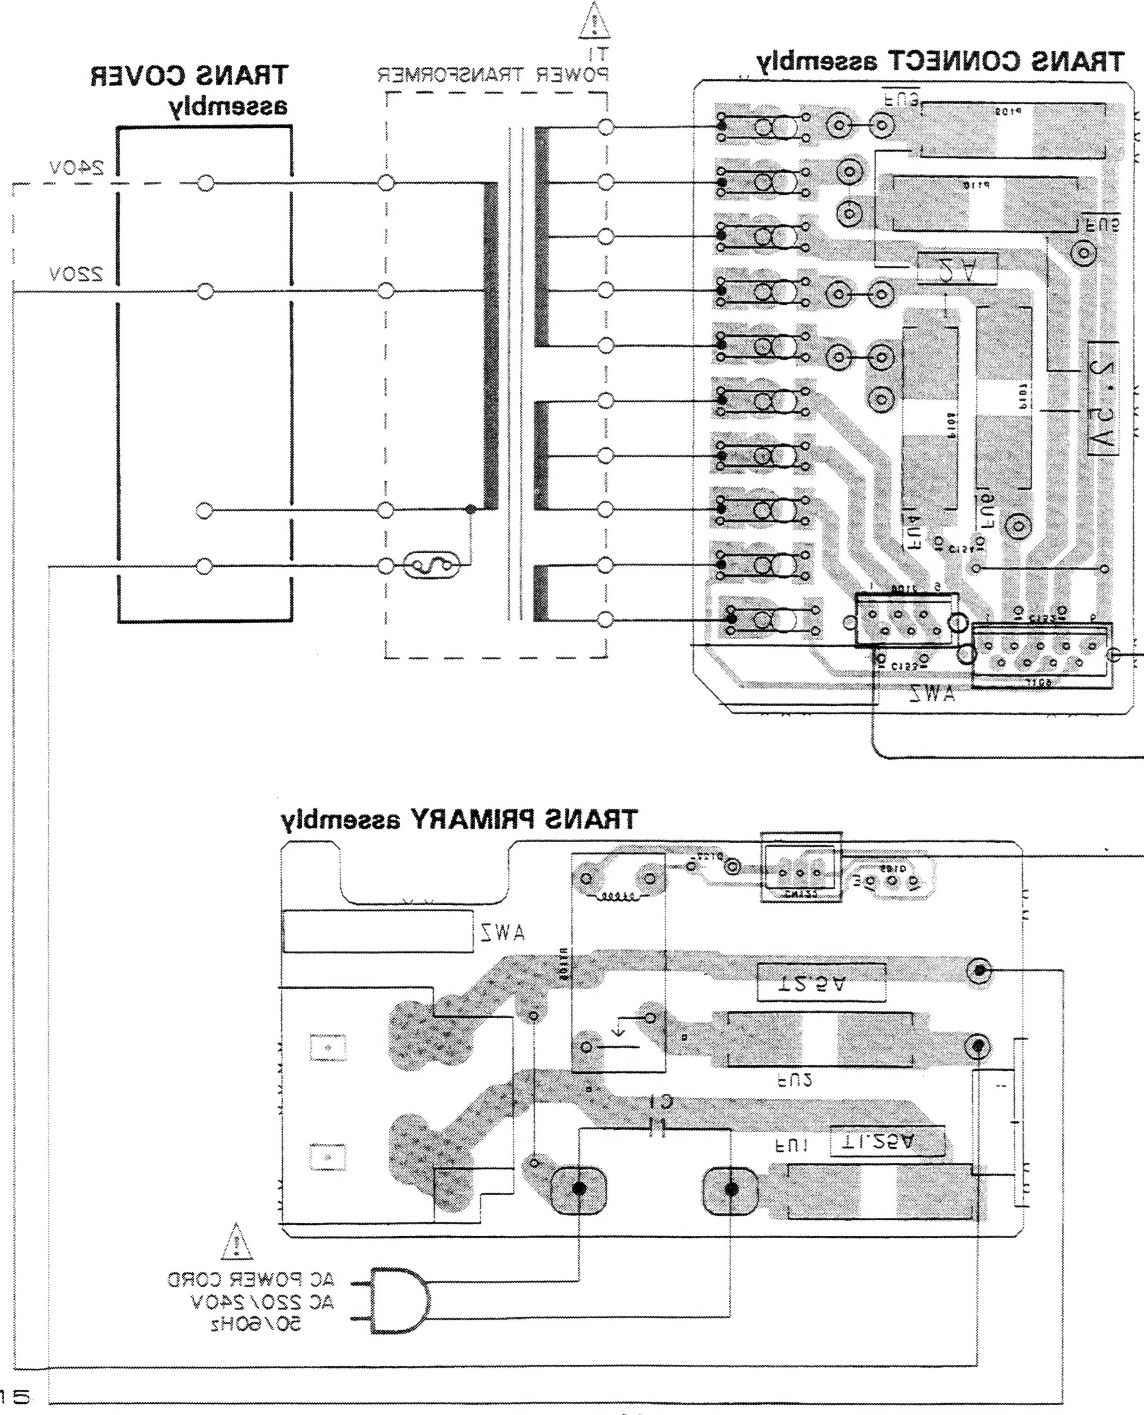

15

15

11

10

9

8

7

6

IC805

0804-0808

0815 0811

IC421

IC101

IC108

5 IC801

801 IC803

9


0108 0803 0150 0108 0425 0421 0813 0814

A

B

C

D

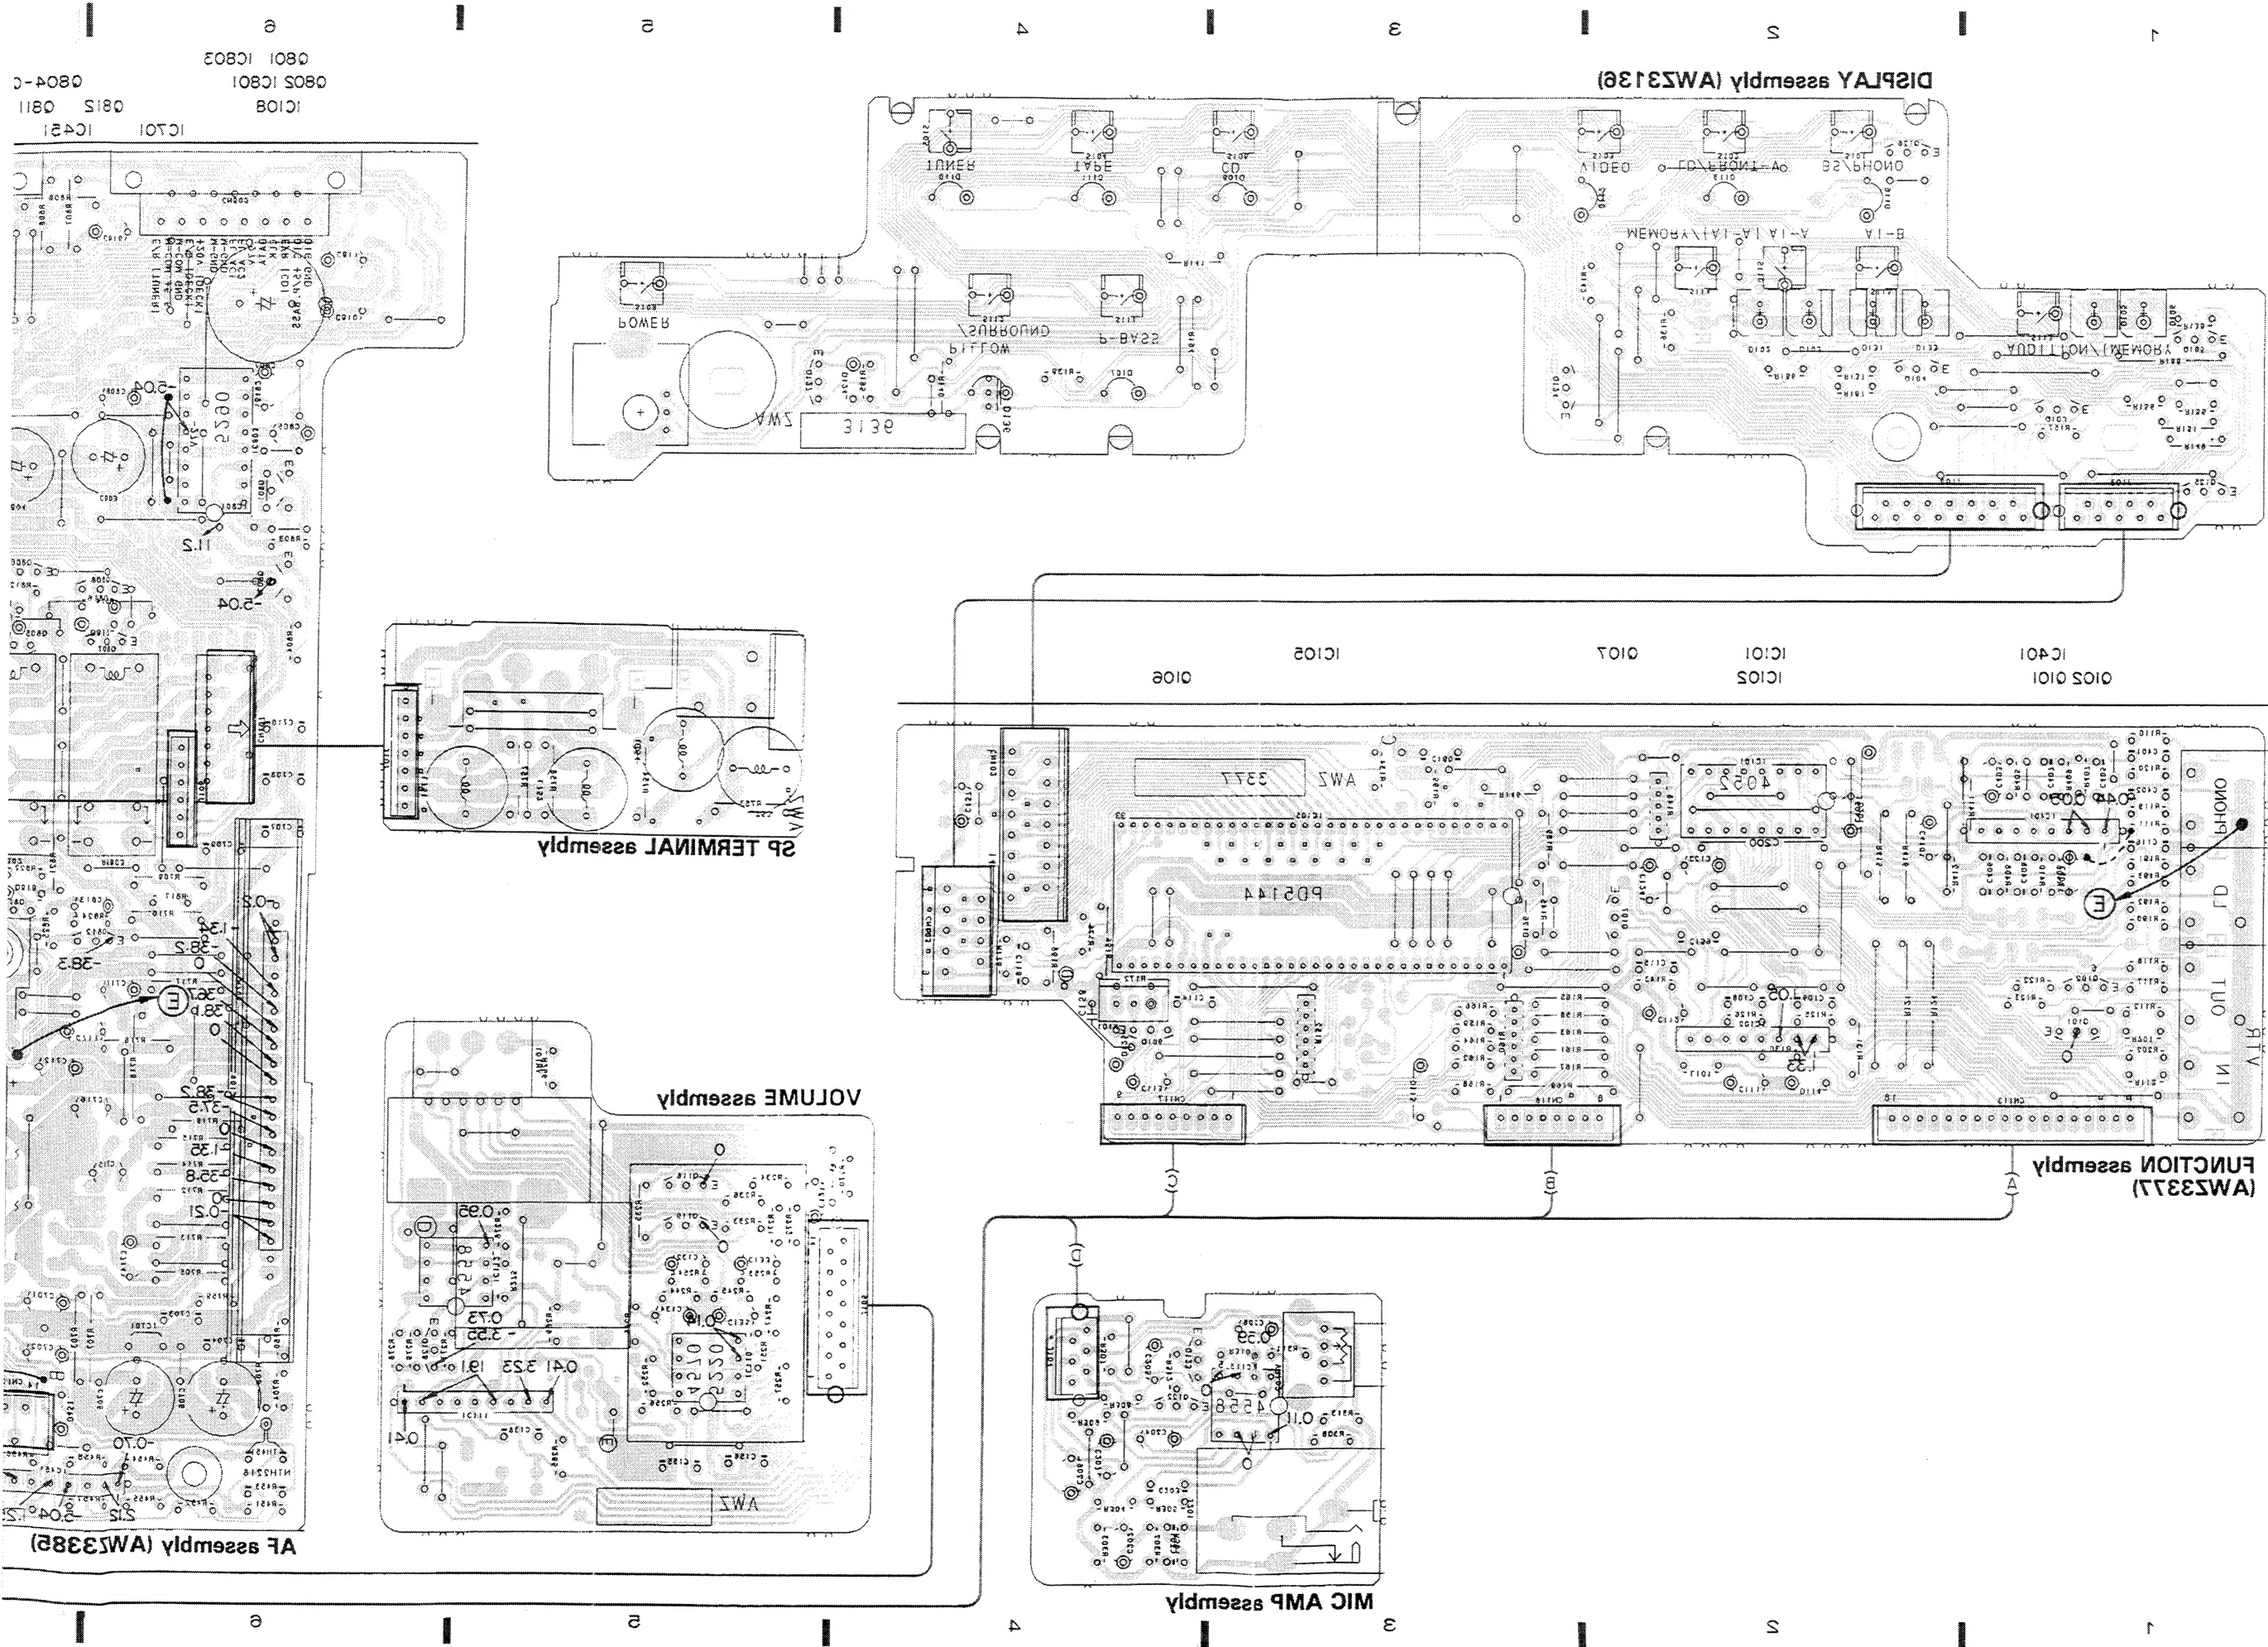

IC201 IC421
0815 0811
0804-C

IC108
0805 IC801
0801 IC803

AF assembly (AW2382)

MIC AMP assembly

VOLUME assembly

SP TERMINAL assembly


DISPLAY assembly (AW23136)

FUNCTION assembly (AW2321)



3.2 FOR A-P510

DISPLAY assembly (AWZ3135)

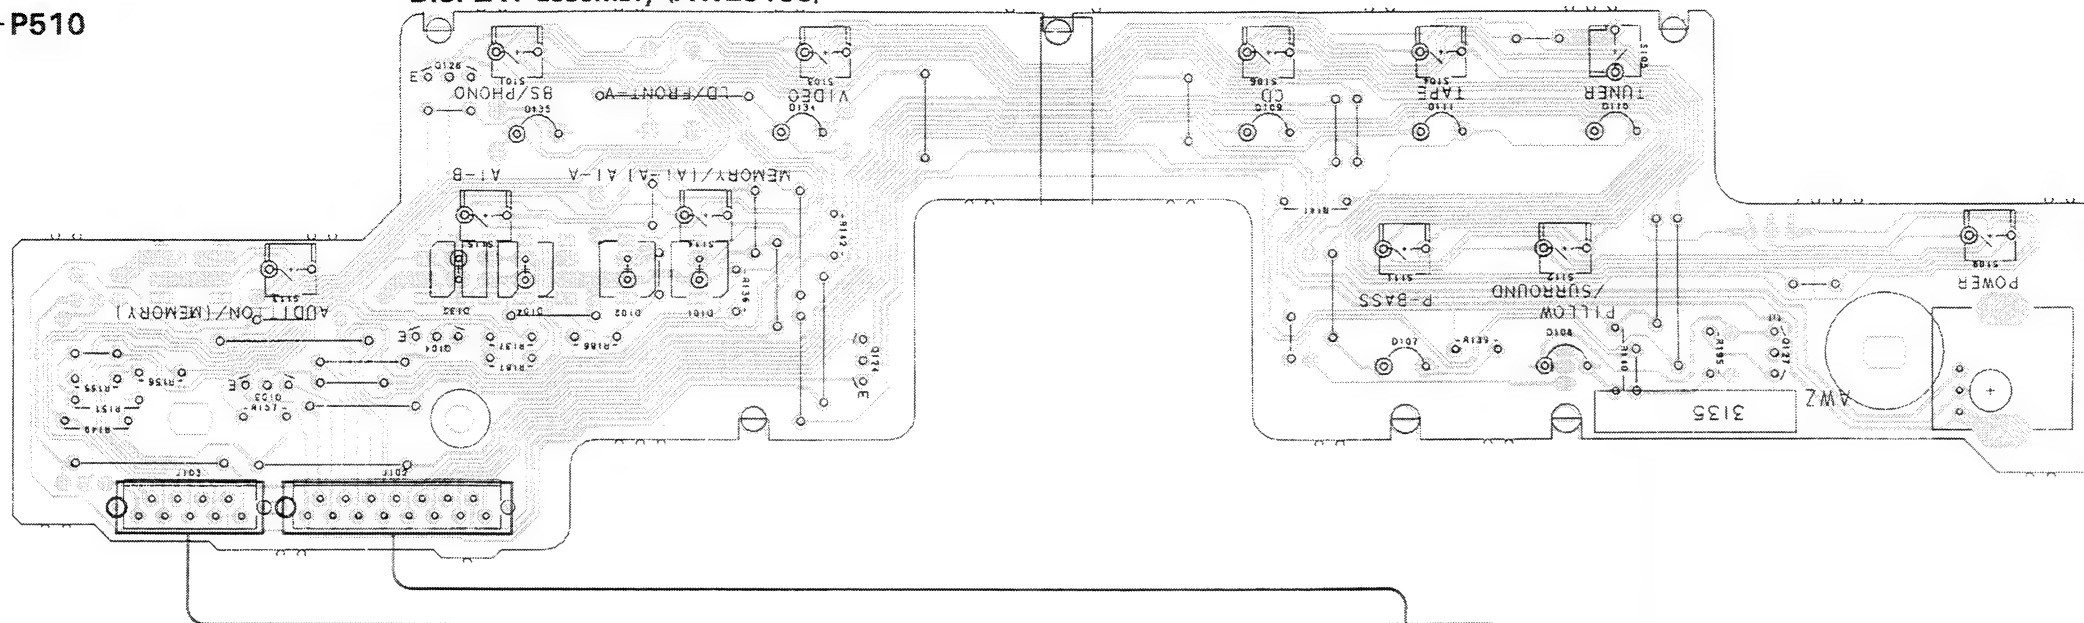


IC401
Q102 Q101

IC101
IC102


Q107

IC105


Q106

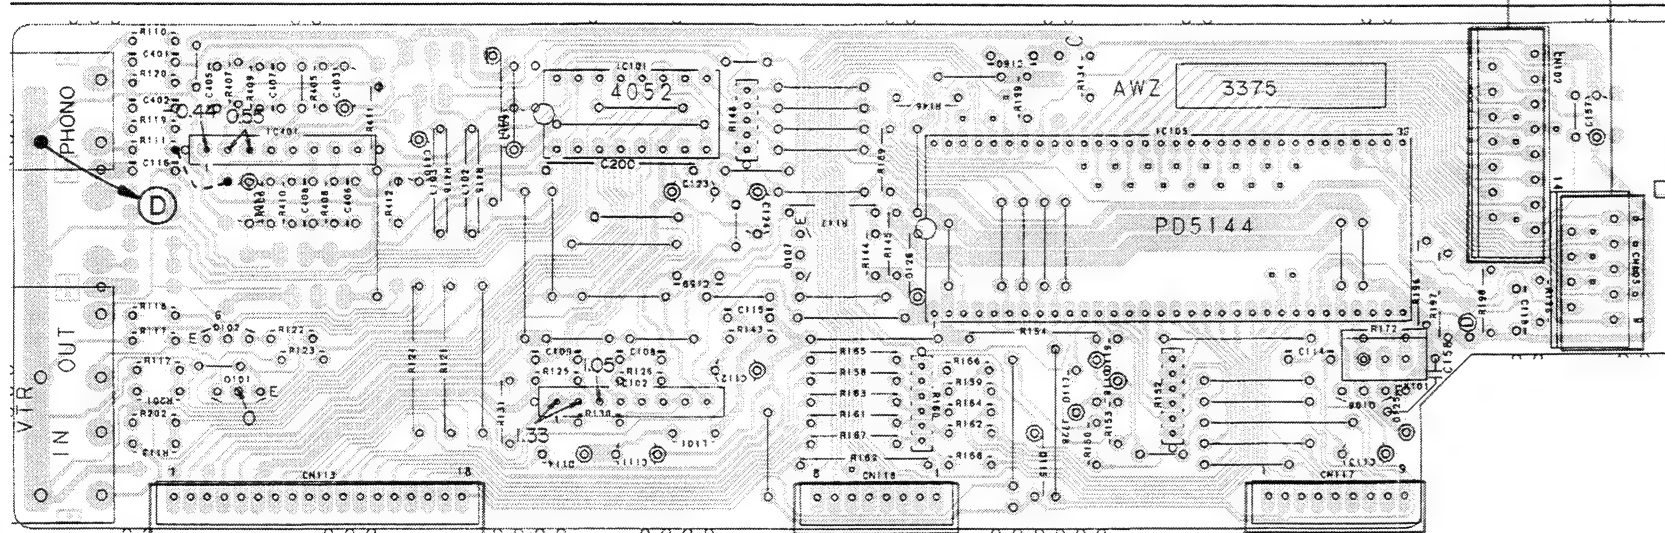

FUNCTION assembly
(AWZ3375)

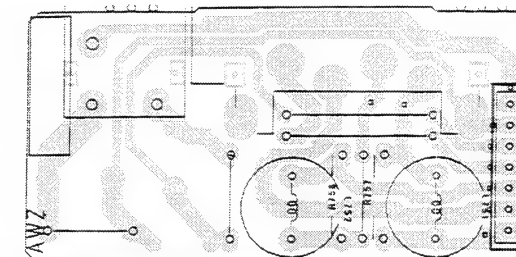


SP TERMINAL assembly

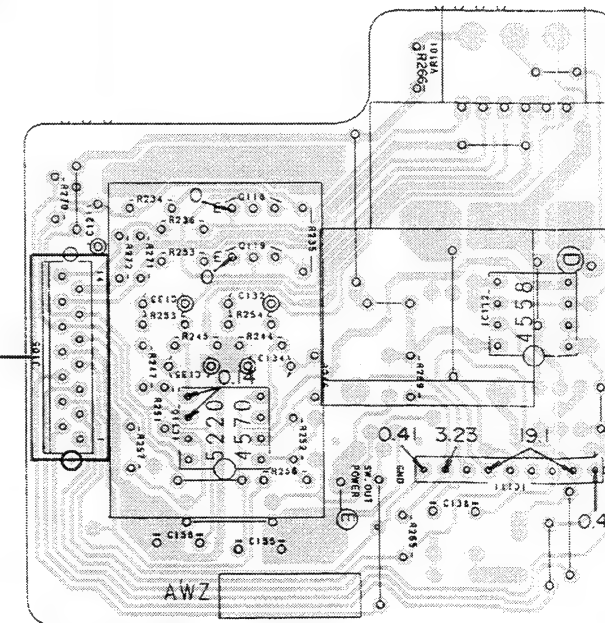

VOLUME assembly

Q801 IC803
Q802 IC801
IC108
Q807 Q808
Q812 Q811
IC701 IC451
Q810

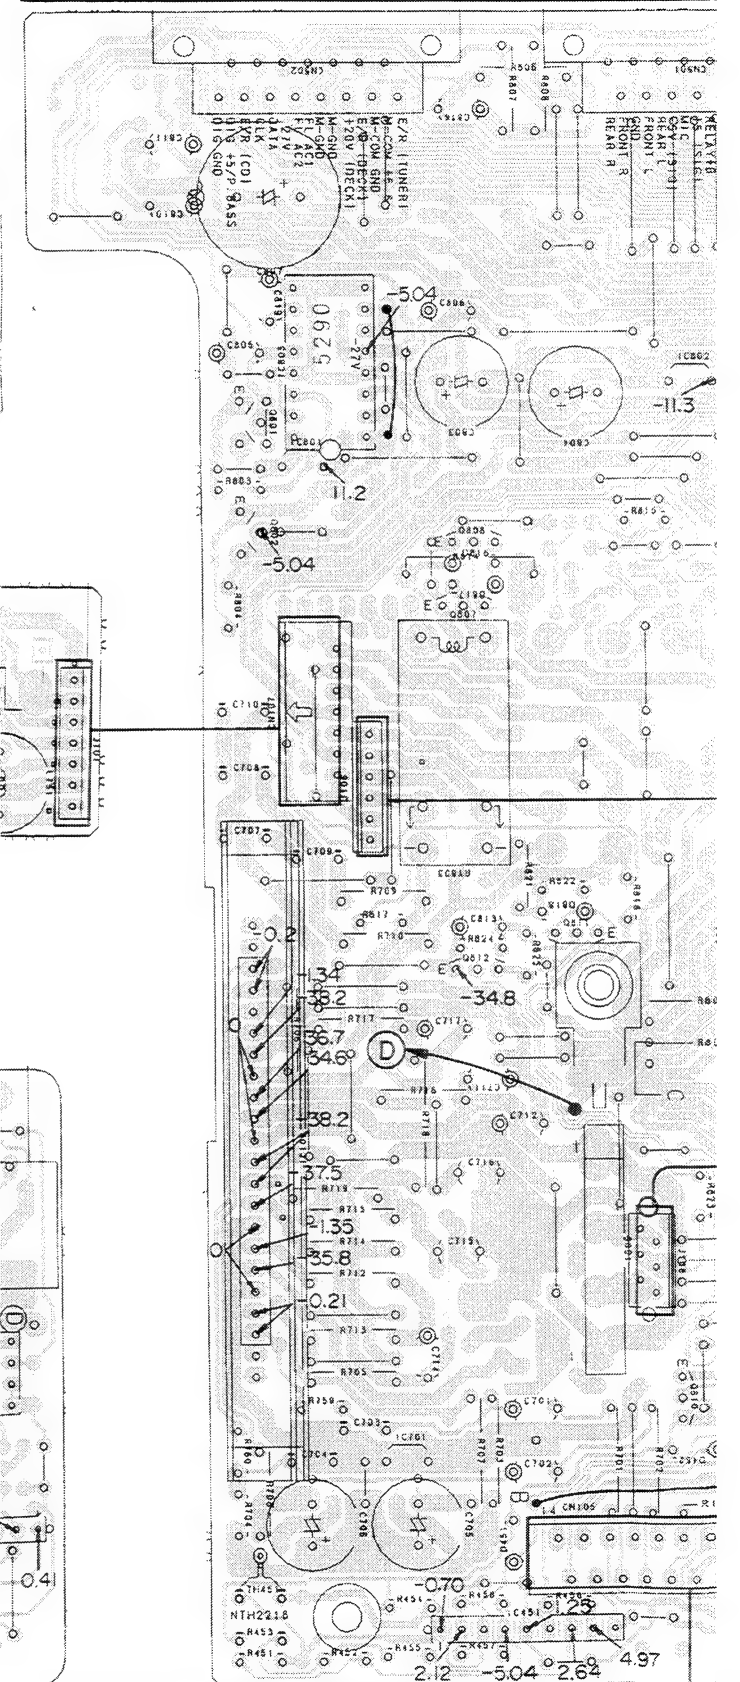


AF assembly (AWZ3383)

A

B

C

D

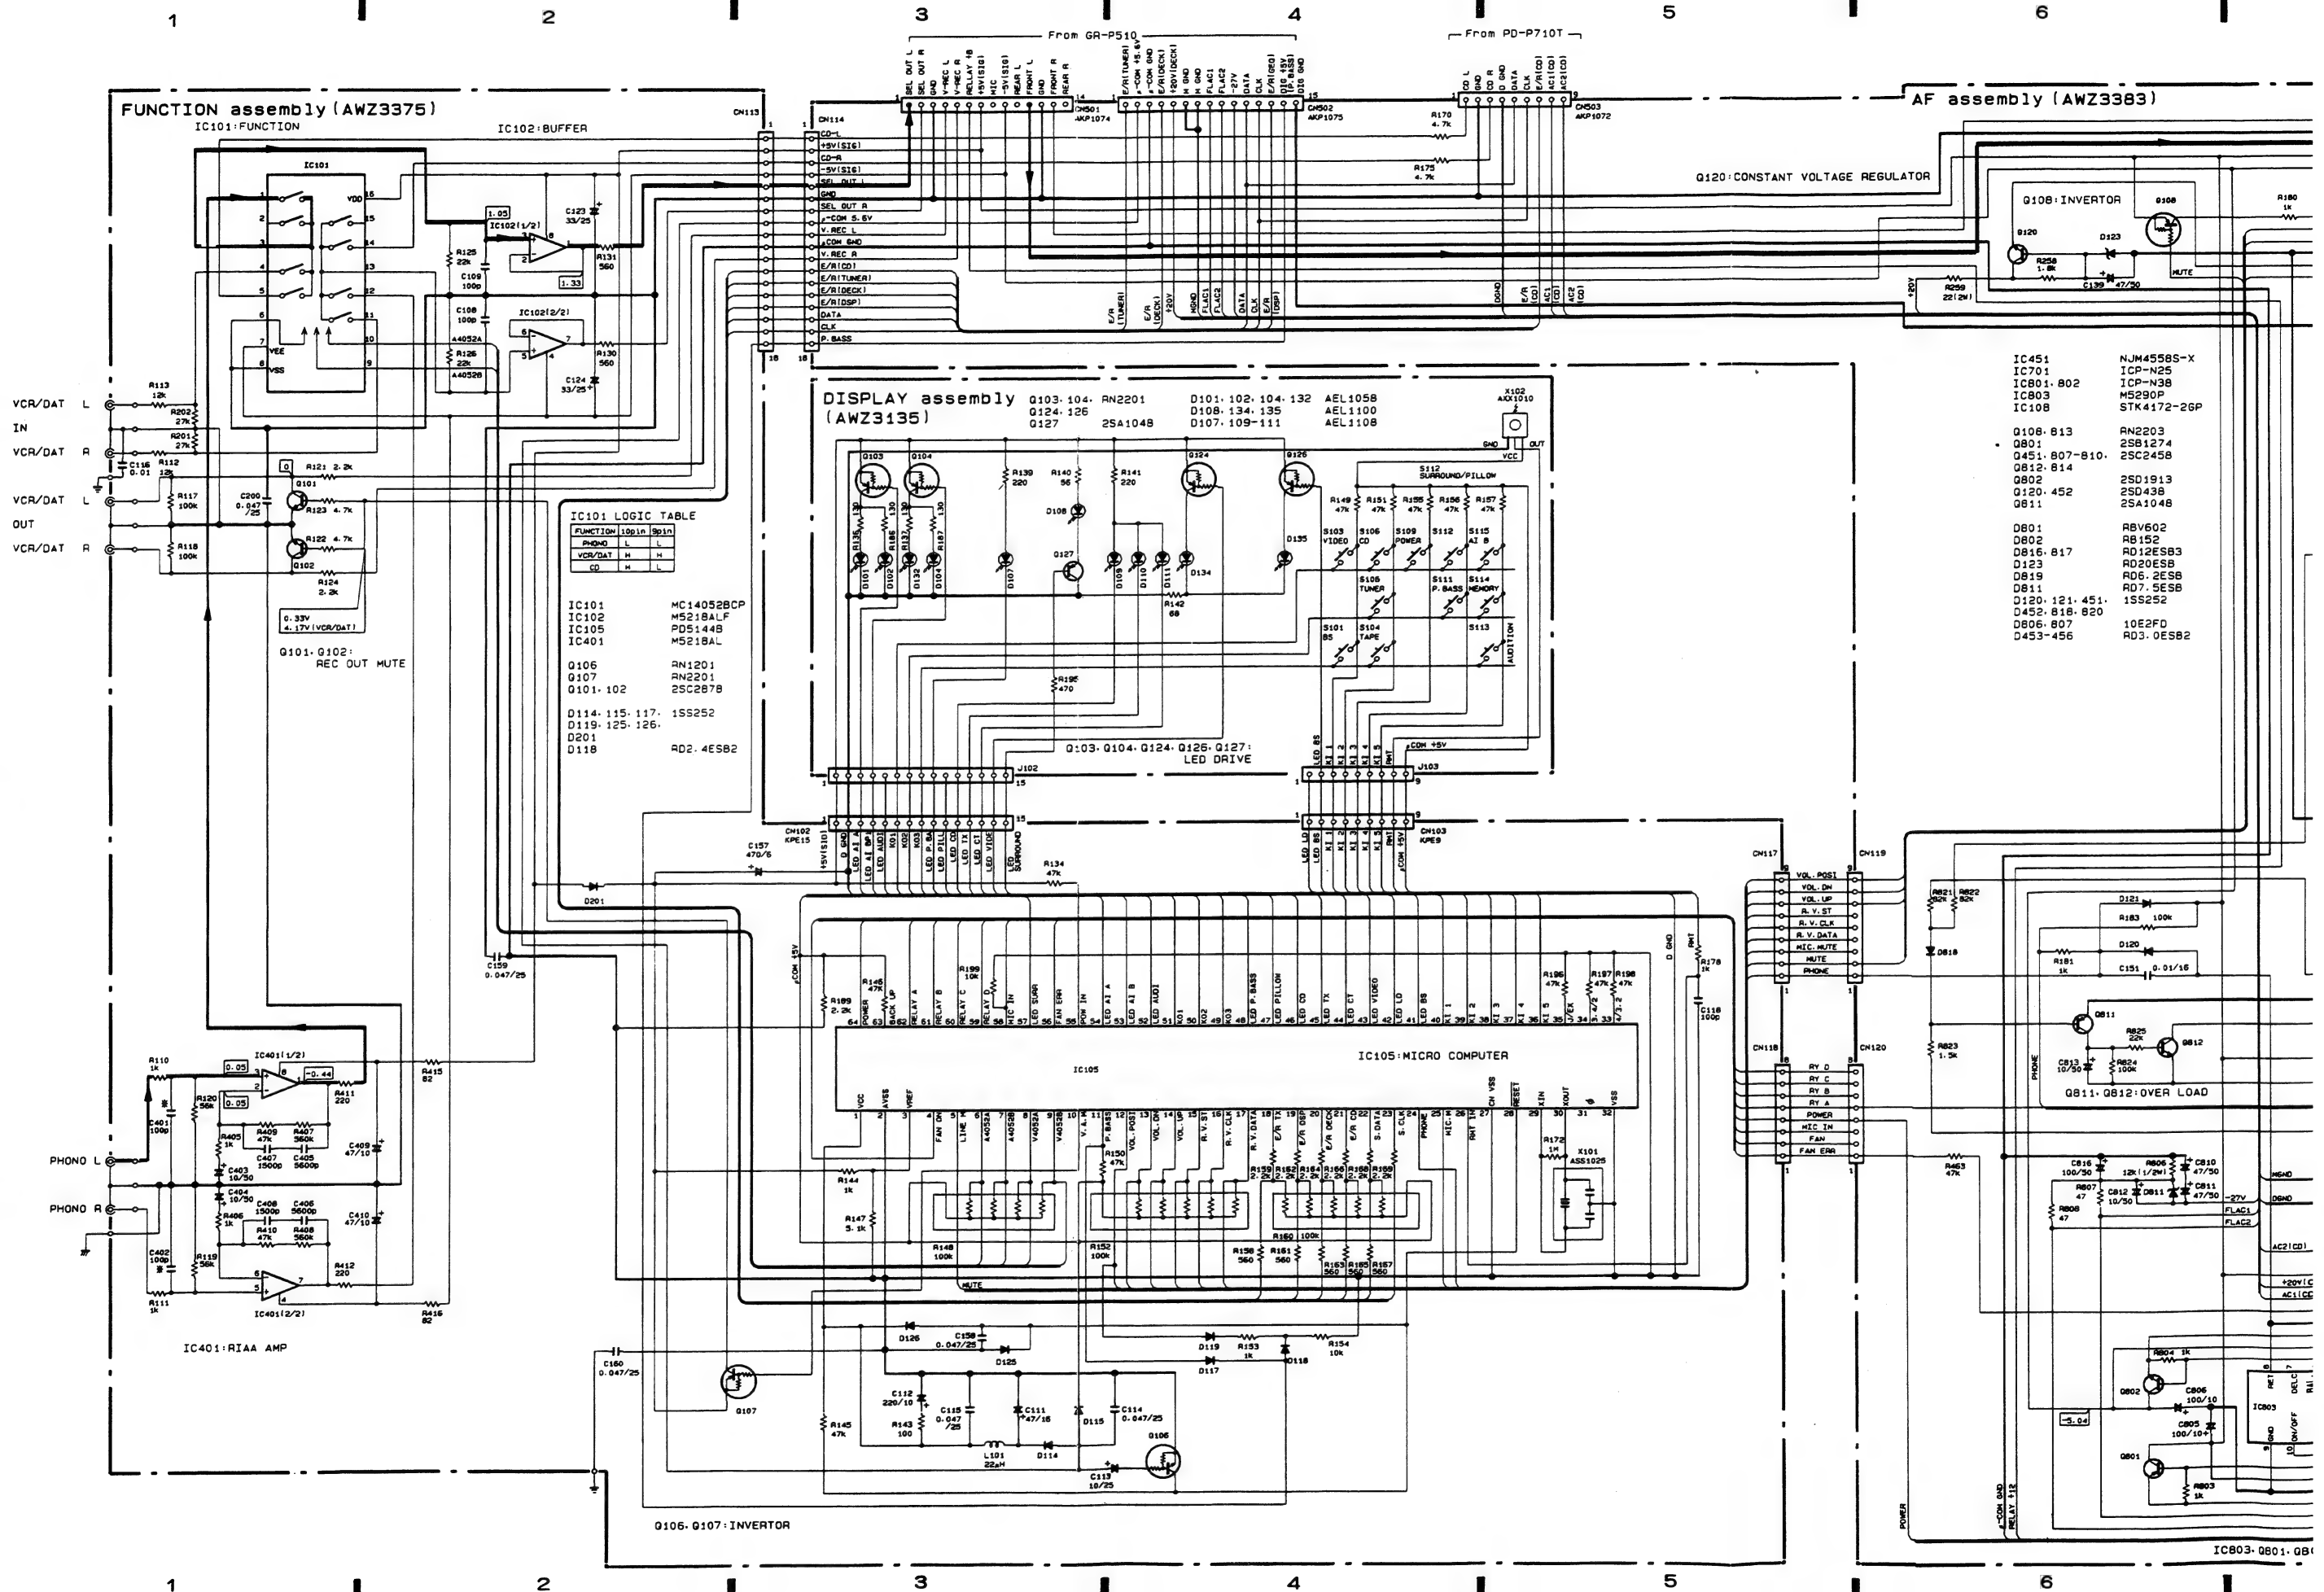

4. PCB 's PARTS LIST

NOTES:

- Parts without part number cannot be supplied.
- Parts marked by "●" are not always kept in stock. Their delivery time may be longer than usual or they may be unavailable.
- The △ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- When ordering resistors, first convert resistance values into code form as shown in the following examples.

Ex. 1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J = 5%, and K = 10%).

560Ω 56 × 10¹ 561..... RD1/4PS □ □ J
 47kΩ 47 × 10³ 473..... RD1/4PS □ □ J
 0.5Ω 0R5..... RN2H □ □ K
 1Ω 010..... RS1P □ □ K

Ex. 2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62kΩ 562 × 10¹ 5621..... RN1/4SR □ □ □ F

4.1 FOR A - P710/HE TYPE

Mark No.	Description	Parts No.	Mark No.	Description	Parts No.
MIC AMP ASSEMBLY					
SEMICONDUCTORS					
IC113	OP-AMP IC	RC4558DXP	D102, 103	LED	AEL1058
Q122	TRANSISTOR	RN2203	D105, 106	LED	AEL1003
Q123	TRANSISTOR	2SC2878	D107, 109	LED (RED)	AEL1108
CAPACITORS			D110, 111	LED (RED)	AEL1108
C201	CERAMIC CAPACITOR	CKDYB332K50	D112, 113	LED	AEL1100
C202	ELECTROLYTIC CAPACIT	CEJA0R1M50	D116	LED	AEL1100
C203	CERAMIC CAPACITOR	CKDYB331K50	D124	DIODE	1SS252
C204, 205	ELECTROLYTIC CAPACIT	CEJA100M25	D131, 133	LED	AEL1058
C206, 207	CERAMIC CAPACITOR	CKDYX473M25	D136	LED (RED, AMBER)	AEL1101
C208	ELECTROLYTIC CAPACIT	CEJA100M25	SWITCHES		
RESISTORS			S101-106	SWITCH	ASG1034
VR102	VARIABLE (10k-X1)	ACS1025	S109-115	SWITCH	ASG1034
OTHERS			RESISTORS		
	Other resistors	RD1/8PM □ □ □ □		All resistors	RD1/8PM □ □ □ □
	JACK (MIC)	AKN1017	OTHERS		
◎ DISPLAY ASSEMBLY (AWZ3136)				REMOTE RECEIVER UNIT	AXX1010
SEMICONDUCTORS			SP TERMINAL ASSEMBLY		
Q103-105	TRANSISTOR	RN2201	COILS		
Q124-126	TRANSISTOR	RN2201	L751-754	COIL	ATH-133
Q127	TRANSISTOR	2SA1048	RESISTORS		
				All resistors	RD1/4PMFL100J
			OTHERS		
				PIN JACK (2P)	AKB1146
				SPEAKER TERMINAL 4P	AKE1026

Mark No.	Description	Parts No.	Mark No.	Description	Parts No.
TRANS CONNECT ASSEMBLY			OTHERS		
CAPACITORS			CN102	CONNECTOR (15P)	KPE15
C152	MYLOR FILM CAPACITOR	CQMA103K50	CN103	CONNECTOR (9P)	KPE9
C153	MYLOR FILM CAPACITOR	CQMA103K250		PIN JACK (4P)	AKB1101
C154	MYLOR FILM CAPACITOR	CQMA103K50		PIN JACK (4P)	AKB1124
◎ FUNCTION ASSEMBLY (AWZ3377)			X101	CERAMIC RESONATOR	ASS1025
SEMICONDUCTORS			H.P. ASSEMBLY		
IC101	LOGIC IC	MC14052BCP	RESISTORS		
IC102	OP-AMP IC	M5218ALF	R755, 756	METAL OXIDE RESISTOR	RS2LMF331J
IC105	AMP CONTROL μ-COM.	PD5144B	OTHERS		
IC401	OP-AMP IC	M5218AL	CN	JACK	AKN1025
Q101, 102	TRANSISTOR	2SC2878	◎ AF ASSEMBLY (AWZ3385)		
Q106	TRANSISTOR	RN1201	SEMICONDUCTORS		
Q107	TRANSISTOR	RN2201	IC108	AUDIO IC	STK4172-2GP
D114, 115	DIODE	1SS252	IC451	OP-AMP IC	NJM4558S-X
D125, 126	DIODE	1SS252	IC701	IC PROTECTOR	ICP-N25
COIL			IC801, 802	IC PROTECTOR	ICP-N38
L101	AXIAL INDUCTOR	LAU220K	IC803	REGURATOR IC	M5290P
CAPACITORS			Q108	TRANSISTOR	RN2203
C108, 109	CERAMIC CAPACITOR	CCDSL101J50	Q120	TRANSISTOR	2SD438
C111	ELECTROLYTIC CAPACIT	CEJA470M16	Q451	TRANSISTOR	2SC2458
C112	ELECTR.CAPACITOR	CEAS221M10	Q452	TRANSISTOR	2SD438
C113	ELECTROLYTIC CAPACIT	CEJA100M25	Q801	TRANSISTOR	2SB1274
C114-116	CERAMIC CAPACITOR	CKDYX473M25	Q802	TRANSISTOR	2SD1913
C118	CERAMIC CAPACITOR	CCDSL101J50	Q804-810	TRANSISTOR	2SC2458
C123, 124	ELECTROLYTIC CAPACIT	CEJA330M25	Q811	TRANSISTOR	2SA1048
C157	ELECTROLYTIC CAPACIT	CEAS471M6	Q812	TRANSISTOR	2SC2458
C158-160	CERAMIC CAPACITOR	CKDYX473M25	Q813	TRANSISTOR	RN2203
C200	CERAMIC CAPACITOR	CKDYX473M25	Q814	TRANSISTOR	2SC2458
C401, 402	CERAMIC CAPACITOR	ACG1017	D120, 121	DIODE	1SS252
C403, 404	ELECTR.CAPACITOR	CEAS100M50	D123	ZENER DIODE	RD20ESB
C405, 406	CERAMIC CAPACITOR	CKDYB562K50	D201	DIODE	1SS252
C407, 408	CERAMIC CAPACITOR	CKDYB152K50	D451, 452	DIODE	1SS252
C409, 410	ELECTR.CAPACITOR	CEAS470M10	D453-456	ZENER DIODE	RD3.0ESB2
RESISTORS			D801	DIODE	RBV602
R148	RESISTOR ARRAY (10k)	RA4T104J	D802	DIODE	RB152
R152	RESISTOR ARRAY (100k)	RA5T104J	D806, 807	DIODE	10E2FD
R160	RESISTOR ARRAY (100k)	RA5T104J	D811	ZENER DIODE	RD7.5ESB
	Other resistors	RD1/8PM □ □ □ □	D812, 813	ZENER DIODE	RD6.2ESB3

Mark No.	Description	Parts No.
RELAIIES		
RY801	RELAY	ASR1027
RY802, 803	RELAY	ASR-111
CAPACITORS		
C139	ELECTR.CAPACITOR	CEAS470M50
C151	CERAMIC CAPACITOR	CKPUYY103M16
C701, 702	ELECTR.CAPACITOR	CEHAQ100M50
C703, 704	CERAMIC CAPACITOR	CKDYB272K50
C705, 706	ELECTROLYTIC CAPACIT	CEHAQ470M50
C707-710	MYLOR FILM CAPACITOR	CQMA104K50
C711, 712	ELECTROLYTIC CAPACIT	CEHAQ100M50
C714	ELECTROLYTIC CAPACIT	CEHAQ101M25
C715	ELECTR.CAPACITOR	ACH1141
C716	ELECTROLYTIC CAPACIT	ACH1143
C717	ELECTROLYTIC CAPACIT	CEHAQ101M25
C801, 802	ELECTROLYTIC CAPACIT	ACH1140
C803	ELECTR.CAPACITOR	CEAS222M16
C804	ELECTR.CAPACITOR	CEAS102M16
C805, 806	ELECTROLYTIC CAPACIT	CEHAQ101M10
C807	ELECTROLYTIC CAPACIT	CEHAQ222M25
C810, 811	ELECTROLYTIC CAPACIT	CEHAQ470M50
C812	ELECTR.CAPACITOR	CEAS100M50
C813	ELECTROLYTIC CAPACIT	CEHAQ100M50
C814	ELECTR.CAPACITOR	CEAS221M10
C815	ELECTR.CAPACITOR	CEAS2R2M50
C816	ELECTR.CAPACITOR	CEAS101M50
C819	ELECTR.CAPACITOR	CEAS100M50
RESISTORS		
R258	CARBON FILM RESISTOR	RD1/4PM182J
R259	METAL OXIDE RESISTOR	RS2LMF220J
R451	METALFILM RESISTER	RN1/4PC2702F
R452	METALFILM RESISTER	RN1/4PC8201F
R453	METALFILM RESISTER	RN1/4PC1202F
R454	METALFILM RESISTER	RN1/4PC1001F
R461, 462	METAL OXIDE RESISTOR	RS2LMF221J

Mark No.	Description	Parts No.
R705, 706	CARBON FILM RESISTOR	RD1/4PM563J
R707, 708	CARBON FILM RESISTOR	RD1/4PM511J
R709, 710	CARBON FILM RESISTOR	RD1/4PMFL4R7J
R712, 713	CARBON FILM RESISTOR	RD1/2PM332J
R714	CARBON FILM RESISTOR	RD1/4PMFL101J
R715	CARBON FILM RESISTOR	RD1/4PM112J
R716	CARBON FILM RESISTOR	RD1/4PMFL101J
R717, 718	CARBON FILM RESISTOR	RD1/2PM332J
R719	CARBON FILM RESISTOR	RD1/4PMFL102J
R801, 802	METAL OXIDE RESISTOR	RS2LMFR22J
R806	CARBON FILM RESISTOR	RD1/2PMFL123J
R807, 808	FUSIBLE RESISTOR	RFA1/4PS470J
R809	METAL OXIDE RESISTOR	RS3LMF471J
R811	METAL OXIDE RESISTOR	RS2LMF471J
R814	METAL OXIDE RESISTOR	RS2LMF471J
	Other resistors	RD1/8PM□□□J
OTHERS		
CN104	CONNECTOR (6P)	KPE6
CN105	CONNECTOR (14P)	KPE14
CN107	CONNECTOR (7P)	KPC7
CN109	CONNECTOR (9P)	KPE9
CN501	SOCKET (14P)	AKP1074
CN502	SOCKET (15P)	AKP1075
CN503	SOCKET (9P)	AKP1072
TH451	THERMISTOR	NTH2218F
TRANS PRIMARY ASSEMBLY		
SEMICONDUCTORS		
Q109	TRANSISTOR	RN1201
D122	DIODE	1SS252
RELAY		
RY105	RELAY	ASR1027
OTHERS		
△	AC SOCKET (1-P)	AKP1034

Mark No.	Description	Parts No.
VOLUME ASSEMBLY		
SEMICONDUCTORS		
IC110	IC	UPC4570C
IC111	MECHANISM DRIVER IC	TA7291S
IC112	OP-AMP IC	RC4558DXP
Q118, 119	TRANSISTOR	2SC2878
Q128	TRANSISTOR	2SC2878
CAPACITORS		
C121	ELECTROLYTIC CAPACIT	CEHAQ2R2M50
C132, 133	ELECTROLYTIC CAPACIT	CEHAQ2R2M50
C134, 135	ELECTR.CAPACITOR	CEHAQ100M50
C138	CERAMIC CAPACITOR	CKDYX104M25
C155, 156	CERAMIC CAPACITOR	CKDYX473M25
RESISTORS		
VR101	VR	ACX1047
	Other resistors	RD1/8PM□□□J

TRANS COVER ASSEMBLY
No parts are supplied with the TRANS COVER Assembly.

4.2 FOR A-P510/HE TYPE

Mark No.	Description	Parts No.
◎ DISPLAY ASSEMBLY (AWZ3135)		
SEMICONDUCTORS		
Q103, 104	TRANSISTOR	RN2201
Q124, 126	TRANSISTOR	RN2201
Q127	TRANSISTOR	2SA1048
D101, 102	LED	AEL1058
D104	LED	AEL1058
D107	LED (RED)	AEL1108
D108	LED	AEL1100
D109-111	LED (RED)	AEL1108
D132	LED	AEL1058
D134, 135	LED	AEL1100
SWITCHES		
S101	SWITCH	ASG1034
S103-106	SWITCH	ASG1034
S109	SWITCH	ASG1034
S111-115	SWITCH	ASG1034
RESISTORS		
R186, 187	CARBON FILM RESISTOR	RD1/4PM131J
	Other resistors	RD1/8PM□□□J
OTHERS		
	REMOTE RECEIVER UNIT	AXX1010
SP TERMINAL ASSEMBLY		
COILS		
L751, 752	COIL	ATH-133
RESISTORS		
R757, 758	CARBON FILM RESISTOR	RD1/4PMFL100J
OTHERS		
	PIN JACK (2P) SPEAKER TERMINAL 4-P	AKB1146 AKE1026

TRANS CONNECT ASSEMBLY

CAPACITORS		
C152	MYLOR FILM CAPACITOR	CQMA103K50
C153	MYLOR FILM CAPACITOR	CQMA103K250
C154	MYLOR FILM CAPACITOR	CQMA103K50

4. PCB 's PARTS LIST

NOTES:

- Parts without part number cannot be supplied.
- Parts marked by "©" are not always kept in stock. Their delivery time may be longer than usual or they may be unavailable.
- The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- When ordering resistors, first convert resistance values into code form as shown in the following examples.

Ex. 1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω	56×10^1	561.....	RD1/4PS \square \square \square J
47k Ω	47×10^3	473.....	RD1/4PS \square \square \square J
0.5 Ω	0R5.....		RN2H \square \square \square K
1 Ω	010.....		RS1P \square \square \square K

Ex. 2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62k Ω	562×10^1	5621.....	RN1/4SR \square \square \square \square F
----------------	-------------------	-----------	---

4.1 FOR A - P710/HE TYPE

Mark No.	Description	Parts No.	Mark No.	Description	Parts No.
MIC AMP ASSEMBLY			D102, 103	LED	AEL1058
SEMICONDUCTORS			D105, 106	LED	AEL1003
IC113	OP-AMP IC	RC4558DXP	D107, 109	LED (RED)	AEL1108
Q122	TRANSISTOR	RN2203	D110, 111	LED (RED)	AEL1108
Q123	TRANSISTOR	2SC2878	D112, 113	LED	AEL1100
CAPACITORS			D116	LED	AEL1100
C201	CERAMIC CAPACITOR	CKDYB332K50	D124	DIODE	1SS252
C202	ELECTROLYTIC CAPACIT	CEJA0R1M50	D131, 133	LED	AEL1058
C203	CERAMIC CAPACITOR	CKDYB331K50	D136	LED (RED, AMBER)	AEL1101
C204, 205	ELECTROLYTIC CAPACIT	CEJA100M25	SWITCHES		
C206, 207	CERAMIC CAPACITOR	CKDYX473M25	S101-106	SWITCH	ASG1034
C208	ELECTROLYTIC CAPACIT	CEJA100M25	S109-115	SWITCH	ASG1034
RESISTORS			RESISTORS		
VR102	VARIABLE (10k-X1)	ACS1025	All resistors		
Other resistors			RD1/8PM \square \square \square \square J		
OTHERS			OTHERS		
JACK (MIC)		AKN1017	REMOTE RECEIVER UNIT		
© DISPLAY ASSEMBLY (AWZ3136)			ALX1010		
SEMICONDUCTORS			SP TERMINAL ASSEMBLY		
Q103-105	TRANSISTOR	RN2201	COILS		
Q124-126	TRANSISTOR	RN2201	L751-754	COIL	ATF1-133
Q127	TRANSISTOR	2SA1048	RESISTORS		
			All resistors		
			RD1/4PMFL100J		
			OTHERS		
			PIN JACK (2P)		
			SPEAKER TERMINAL 4P		
			AB1146		
			AE1026		

Mark No.	Description	Parts No.
TRANS CONNECT ASSEMBLY		
CAPACITORS		
C152	MYLOR FILM CAPACITOR	CQMA103K50
C153	MYLOR FILM CAPACITOR	CQMA103K250
C154	MYLOR FILM CAPACITOR	CQMA103K50

© FUNCTION ASSEMBLY (AWZ3377)

SEMICONDUCTORS

IC101	LOGIC IC	MC14052BCP
IC102	OP-AMP IC	M5218ALF
IC105	AMP CONTROL μ-COM.	PD5144B
IC401	OP-AMP IC	M5218AL
Q101, 102	TRANSISTOR	2SC2878
Q106	TRANSISTOR	RN1201
Q107	TRANSISTOR	RN2201
D114, 115	DIODE	1SS252
D125, 126	DIODE	1SS252

COIL

L101	AXIAL INDUCTOR	LAU220K
------	----------------	---------

CAPACITORS

C108, 109	CERAMIC CAPACITOR	CCDSL101J50
C111	ELECTROLYTIC CAPACIT	CEJA470M16
C112	ELECTR.CAPACITOR	CEAS221M10
C113	ELECTROLYTIC CAPACIT	CEJA100M25
C114-116	CERAMIC CAPACITOR	CKDYX473M25
C118	CERAMIC CAPACITOR	CCDSL101J50
C123, 124	ELECTROLYTIC CAPACIT	CEJA330M25
C157	ELECTROLYTIC CAPACIT	CEAS471M6
C158-160	CERAMIC CAPACITOR	CKDYX473M25
C200	CERAMIC CAPACITOR	CKDYX473M25
C401, 402	CERAMIC CAPACITOR	ACG1017
C403, 404	ELECTR.CAPACITOR	CEAS100M50
C405, 406	CERAMIC CAPACITOR	CKDYB562K50
C407, 408	CERAMIC CAPACITOR	CKDYB152K50
C409, 410	ELECTR.CAPACITOR	CEAS470M10

RESISTORS

R148	RESISTOR ARRAY (10k)	RA4T104J
R152	RESISTOR ARRAY (100k)	RA5T104J
R160	RESISTOR ARRAY (100k)	RA5T104J
	Other resistors	RD1/8PM□□□□J

Mark No.	Description	Parts No.
OTHERS		
CN102	CONNECTOR (15P)	KPE15
CN103	CONNECTOR (9P)	KPE9
	PIN JACK (4P)	AKB1101
	PIN JACK (4P)	AKB1124
X101	CERAMIC RESONATOR	ASS1025

H.P. ASSEMBLY

RESISTORS

R755, 756	METAL OXIDE RESISTOR	RS2LMF331J
-----------	----------------------	------------

OTHERS

CN	JACK	AKN1025
----	------	---------

© AF ASSEMBLY (AWZ3385)

SEMICONDUCTORS

IC108	AUDIO IC	STK4172-2GP
IC451	OP-AMP IC	NJM4558S-X
IC701	IC PROTECTOR	ICP-N25
IC801, 802	IC PROTECTOR	ICP-N38
IC803	REGURATOR IC	M5290P
Q108	TRANSISTOR	RN2203
Q120	TRANSISTOR	2SD438
Q451	TRANSISTOR	2SC2458
Q452	TRANSISTOR	2SD438
Q801	TRANSISTOR	2SB1274
Q802	TRANSISTOR	2SD1913
Q804-810	TRANSISTOR	2SC2458
Q811	TRANSISTOR	2SA1048
Q812	TRANSISTOR	2SC2458
Q813	TRANSISTOR	RN2203
Q814	TRANSISTOR	2SC2458
D120, 121	DIODE	1SS252
D123	ZENER DIODE	RD20ESB
D201	DIODE	1SS252
D451, 452	DIODE	1SS252
D453-456	ZENER DIODE	RD3.0ESB2
D801	DIODE	RBV602
D802	DIODE	RB152
D806, 807	DIODE	10E2FD
D811	ZENER DIODE	RD7.5ESB
D812, 813	ZENER DIODE	RD6.2ESB3
D814-817	ZENER DIODE	RD12ESB3
D818	DIODE	1SS252
D819	ZENER DIODE	RD6.2ESB
D820	DIODE	1SS252

Mark No.	Description	Parts No.
RELAYS		
RY801	RELAY	ASR1027
RY802, 803	RELAY	ASR-111
CAPACITORS		
C139	ELECTR.CAPACITOR	CEAS470M50
C151	CERAMIC CAPACITOR	CKPUYY103M16
C701, 702	ELECTR.CAPACITOR	CEHAQ100M50
C703, 704	CERAMIC CAPACITOR	CKDYB272K50
C705, 706	ELECTROLYTIC CAPACIT	CEHAQ470M50
C707-710	MYLOR FILM CAPACITOR	CQMA104K50
C711, 712	ELECTROLYTIC CAPACIT	CEHAQ100M50
C714	ELECTROLYTIC CAPACIT	CEHAQ101M25
C715	ELECTR.CAPACITOR	ACH1141
C716	ELECTROLYTIC CAPACIT	ACH1143
C717	ELECTROLYTIC CAPACIT	CEHAQ101M25
C801, 802	ELECTROLYTIC CAPACIT	ACH1140
C803	ELECTR.CAPACITOR	CEAS222M16
C804	ELECTR.CAPACITOR	CEAS102M16
C805, 806	ELECTROLYTIC CAPACIT	CEHAQ101M10
C807	ELECTROLYTIC CAPACIT	CEHAQ222M25
C810, 811	ELECTROLYTIC CAPACIT	CEHAQ470M50
C812	ELECTR.CAPACITOR	CEAS100M50
C813	ELECTROLYTIC CAPACIT	CEHAQ100M50
C814	ELECTR.CAPACITOR	CEAS221M10
C815	ELECTR.CAPACITOR	CEAS2R2M50
C816	ELECTR.CAPACITOR	CEAS101M50
C819	ELECTR.CAPACITOR	CEAS100M50
RESISTORS		
R258	CARBON FILM RESISTOR	RD1/4PM182J
R259	METAL OXIDE RESISTOR	RS2LMF220J
R451	METALFILM RESISTER	RN1/4PC2702F
R452	METALFILM RESISTER	RN1/4PC8201F
R453	METALFILM RESISTER	RN1/4PC1202F
R454	METALFILM RESISTER	RN1/4PC1001F
R461, 462	METAL OXIDE RESISTOR	RS2LMF221J

Mark No.	Description	Parts No.
R705, 706	CARBON FILM RESISTOR	RD1/4PM563J
R707, 708	CARBON FILM RESISTOR	RD1/4PM511J
R709, 710	CARBON FILM RESISTOR	RD1/4PMFL4R7J
R712, 713	CARBON FILM RESISTOR	RD1/2PM332J
R714	CARBON FILM RESISTOR	RD1/4PMFL101J
R715	CARBON FILM RESISTOR	RD1/4PM112J
R716	CARBON FILM RESISTOR	RD1/4PMFL101J
R717, 718	CARBON FILM RESISTOR	RD1/2PM332J
R719	CARBON FILM RESISTOR	RD1/4PMFL102J
R801, 802	METAL OXIDE RESISTOR	RS2LMFR22J
R806	CARBON FILM RESISTOR	RD1/2PMFL123J
R807, 808	FUSIBLE RESISTOR	RFA1/4PS470J
R809	METAL OXIDE RESISTOR	RS3LMF471J
R811	METAL OXIDE RESISTOR	RS2LMF471J
R814	METAL OXIDE RESISTOR	RS2LMF471J
	Other resistors	RD1/8PM□□□J
OTHERS		
CN104	CONNECTOR (6P)	KPE6
CN105	CONNECTOR (14P)	KPE14
CN107	CONNECTOR (7P)	KPC7
CN109	CONNECTOR (9P)	KPE9
CN501	SOCKET (14P)	AKP1074
CN502	SOCKET (15P)	AKP1075
CN503	SOCKET (9P)	AKP1072
TH451	THERMISTOR	NTH2218F

TRANS PRIMARY ASSEMBLY SEMICONDUCTORS

Q109	TRANSISTOR	RN1201
D122	DIODE	1SS252
RELAY		
RY105	RELAY	ASR1027
OTHERS		
△	AC SOCKET (1-P)	AKP1034

Mark No.	Description	Parts No.
----------	-------------	-----------

VOLUME ASSEMBLY

SEMICONDUCTORS

IC110	IC	UPC4570C
IC111	MECHANISM DRIVER	TA7291S
	IC	
IC112	OP-AMP IC	RC4558DXP
Q118, 119	TRANSISTOR	2SC2878
Q128	TRANSISTOR	2SC2878

CAPACITORS

C121	ELECTROLYTIC CAPACIT	CEHAQ2R2M50
C132, 133	ELECTROLYTIC CAPACIT	CEHAQ2R2M50
C134, 135	ELECTR.CAPACITOR	CEHAQ100M50
C138	CERAMIC CAPACITOR	CKDYX104M25
C155, 156	CERAMIC CAPACITOR	CKDYX473M25

RESISTORS

VR101	VR	ACX1047
	Other resistors	RD1/8PM□□□J

TRANS COVER ASSEMBLY

No parts are supplied with the TRANS COVER Assembly.

4.2 FOR A-P510/HE TYPE

Mark No.	Description	Parts No.
----------	-------------	-----------

◎ DISPLAY ASSEMBLY (AWZ3135)

SEMICONDUCTORS

Q103, 104	TRANSISTOR	RN2201
Q124, 126	TRANSISTOR	RN2201
Q127	TRANSISTOR	2SA1048
D101, 102	LED	AEL1058
D104	LED	AEL1058
D107	LED (RED)	AEL1108
D108	LED	AEL1100
D109-111	LED (RED)	AEL1108
D132	LED	AEL1058
D134, 135	LED	AEL1100

SWITCHES

S101	SWITCH	ASG1034
S103-106	SWITCH	ASG1034
S109	SWITCH	ASG1034
S111-115	SWITCH	ASG1034

RESISTORS

R186, 187	CARBON FILM RESISTOR	RD1/4PM131J
	Other resistors	RD1/8PM□□□J

OTHERS

REMOTE RECEIVER UNIT	AXX1010
----------------------	---------

SP TERMINAL ASSEMBLY

COILS

L751, 752	COIL	ATH-133
-----------	------	---------

RESISTORS

R757, 758	CARBON FILM RESISTOR	RD1/4PMFL100J
-----------	----------------------	---------------

OTHERS

PIN JACK (2P)	AKB1146
SPEAKER TERMINAL 4-P	AKE1026

TRANS CONNECT ASSEMBLY

CAPACITORS

C152	MYLOR FILM CAPACITOR	CQMA103K50
C153	MYLOR FILM CAPACITOR	CQMA103K250
C154	MYLOR FILM CAPACITOR	CQMA103K50

Mark No.	Description	Parts No.
◎ FUNCTION ASSEMBLY (AWZ3375)		
SEMICONDUCTORS		
IC101	LOGIC IC	MC14052BCP
IC102	OP-AMP IC	M5218ALF
IC105	AMP CONTROL μ -COM.	PD5144B
IC401	OP-AMP IC	M5218AL
Q101, 102	TRANSISTOR	2SC2878
Q106	TRANSISTOR	RN1201
Q107	TRANSISTOR	RN2201
D114, 115	DIODE	1SS252
D117	DIODE	1SS252
D118	ZENER DIODE	RD2.4ESB2
D119, 125	DIODE	1SS252
D126, 201	DIODE	1SS252
COIL		
L101	AXIAL INDUCTOR	LAU220K
CAPACITORS		
C108, 109	CERAMIC CAPACITOR	CCDSL101J50
C111	ELECTROLYTIC CAPACIT	CEJA470M16
C112	ELECTR.CAPACITOR	CEAS221M10
C113	ELECTROLYTIC CAPACIT	CEJA100M25
C114, 115	CERAMIC CAPACITOR	CKDYX473M25
C116	CERAMIC CAPACITOR	CKDYF103Z50
C118	CERAMIC CAPACITOR	CCDSL101J50
C123, 124	ELECTROLYTIC CAPACIT	CEJA330M25
C155, 156	CERAMIC CAPACITOR	CKDYX473M25
C157	ELECTROLYTIC CAPACIT	CEAS471M6
C158, 200	CERAMIC CAPACITOR	CKDYX473M25
C401, 402	CERAMIC CAPACITOR	ACG1017
C403, 404	ELECTR.CAPACITOR	CEAS100M50
C405, 406	CERAMIC CAPACITOR	CKDYB562K50
C407, 408	CERAMIC CAPACITOR	CKDYB152K50
C409, 410	ELECTR.CAPACITOR	CEAS470M10
RESISTORS		
R148	RESISTOR ARRAY (10k)	RA4T104J
R152, 160	RESISTOR ARRAY (100k)	RA5T104J
	Other resistors	RD1/8PM□□□□

Mark No.	Description	Parts No.
OTHERS		
	PIN JACK (2P)	AKB1100
	PIN JACK (4P)	AKB1101
CN102	CONNECTOR (15P)	KPE15
CN103	CONNECTOR (9P)	KPE9
X101	CERAMIC RESONATOR	ASS1025
H.P. ASSEMBLY		
RESISTORS		
R755, 756	METAL OXIDE RESISTOR	RS2LMF331J
OTHERS		
CN	JACK (HEAD PHONE)	AKN1025
◎ AF ASSEMBLY (AWZ3383)		
SEMICONDUCTORS		
IC108	AUDIO IC	STK4172-2GP
IC451	OP-AMP IC	NJM4558S-X
IC701	IC PROTECTOR	ICP-N25
IC801, 802	IC PROTECTOR	ICP-N38
IC803	REGURATOR IC	M5290P
Q108	TRANSISTOR	RN2203
Q120	TRANSISTOR	2SD438
Q451	TRANSISTOR	2SC2458
Q452	TRANSISTOR	2SD438
Q801	TRANSISTOR	2SB1274
Q802	TRANSISTOR	2SD1913
Q807-810	TRANSISTOR	2SC2458
Q811	TRANSISTOR	2SA1048
Q812	TRANSISTOR	2SC2458
Q813	TRANSISTOR	RN2203
Q814	TRANSISTOR	2SC2458
D120, 121	DIODE	1SS252
D123	ZENER DIODE	RD20ESB
D451, 452	DIODE	1SS252
D453-456	ZENER DIODE	RD3.0ESB2
D801	DIODE	RBV602
D802	DIODE	RB152
D806, 807	DIODE	10E2FD
D811	ZENER DIODE	RD7.5ESB
D816, 817	ZENER DIODE	RD12ESB3
D818	DIODE	1SS252
D819	ZENER DIODE	RD6.2ESB
D820	DIODE	1SS252

Mark No.	Description	Parts No.
RELAY		
RY803	RELAY	ASR-111
CAPACITORS		
C139	ELECTR.CAPACITOR	CEAS470M50
C151	CERAMIC CAPACITOR	CKPUYY103M16
C701, 702	ELECTR.CAPACITOR	CEHAQ100M50
C703, 704	CERAMIC CAPACITOR	CKDYB272K50
C705, 706	ELECTROLYTIC CAPACIT	CEHAQ470M50
C707-710	MYLOR FILM CAPACITOR	CQMA104K50
C711, 712	ELECTROLYTIC CAPACIT	CEHAQ100M50
C714	ELECTROLYTIC CAPACIT	ACH1186
C715	ELECTR.CAPACITOR	CEANP100M50
C716	ELECTROLYTIC CAPACIT	CEANP470M50
C717	ELECTROLYTIC CAPACIT	CEANP101M25
C801, 802	ELECTROLYTIC CAPACIT	ACH1109
C803	ELECTR.CAPACITOR	CEAS222M16
C804	ELECTR.CAPACITOR	CEAS102M16
C805, 806	ELECTROLYTIC CAPACIT	CEHAQ101M10
C807	ELECTROLYTIC CAPACIT	CEHAQ222M25
C810, 811	ELECTROLYTIC CAPACIT	CEHAQ470M50
C812, 813	ELECTR.CAPACITOR	CEHAQ100M50
C814	ELECTROLYTIC CAPACIT	CEHAQ221M10
C815	ELECTR.CAPACITOR	CEAS2R2M50
C816	ELECTR.CAPACITOR	CEHAQ101M50
C819	ELECTR.CAPACITOR	CEHAQ100M50
RESISTORS		
R258	CARBON FILM RESISTOR	RD1/4PM182J
R259	METAL OXIDE RESISTOR	RS2LMF220J
R451	METALFILM RESISTER	RN1/4PC2702F
R452	METALFILM RESISTER	RN1/4PC8201F
R453	METALFILM RESISTER	RN1/4PC1202F
R454	METALFILM RESISTER	RN1/4PC1001F
R461, 462	METAL OXIDE RESISTOR	RS2LMF221J
R705, 706	CARBON FILM RESISTOR	RD1/4PM563J

Mark No.	Description	Parts No.
R707, 708	CARBON FILM RESISTOR	RD1/4PM511J
R709, 710	CARBON FILM RESISTOR	RD1/4PMFL4R7J
R712, 713	CARBON FILM RESISTOR	RD1/4PM332J
R714	CARBON FILM RESISTOR	RD1/4PMFL101J
R715	CARBON FILM RESISTOR	RD1/4PM112J
R716	CARBON FILM RESISTOR	RD1/4PMFL101J
R717, 718	CARBON FILM RESISTOR	RD1/4PM332J
R719	CARBON FILM RESISTOR	RD1/4PMFL102J
R801, 802	METAL OXIDE RESISTOR	RS2LMFR22J
R806	CARBON FILM RESISTOR	RD1/2PMFL123J
R807, 808	FUSIBLE RESISTOR	RFA1/4PS470J
R814	METAL OXIDE RESISTOR	RS2LMF331J
	Other resistors	RD1/8PM□□□J
OTHERS		
CN105	CONNECTOR (14P)	KPE14
CN107	CONNECTOR (7P)	KPC7
CN109	CONNECTOR (9P)	KPE9
CN501	SOCKET (14P)	AKP1074
CN502	SOCKET (15P)	AKP1075
CN503	SOCKET (9P)	AKP1072
TH451	THERMISTOR	NTH2218F

TRANS PRIMARY ASSEMBLY
SEMICONDUCTORS

Q109	TRANSISTOR	RN1201
D122	DIODE	1SS252

RELAY

RY105	RELAY	ASR1027
-------	-------	---------

OTHERS

△	AC SOCKET 1-P	AKP1034
---	---------------	---------


Mark No.	Description	Parts No.
VOLUME ASSEMBLY		
SEMICONDUCTORS		
IC110	IC	UPC4570C
IC111	MECHANISM DRIVER	TA7291S
	IC	
IC112	OP-AMP IC	RC4558DXP
Q118, 119	TRANSISTOR	2SC2878
CAPACITORS		
C121	ELECTROLYTIC CAPACIT	CEHAQ2R2M50
C132, 133	ELECTROLYTIC CAPACIT	CEHAQ2R2M50
C134, 135	ELECTR.CAPACITOR	CEHAQ100M50
C138	CERAMIC CAPACITOR	CKDYX104M25
C159, 160	CERAMIC CAPACITOR	CKDYX473M25
RESISTORS		
VR101	VR	ACX1047
	CARBONFILM RESISTOR	RD1/8PM□□□J

TRANS COVER ASSEMBLY


No parts are supplied with the TRANS COVER Assembly.

5. DISASSEMBLY


1. Remove the bonnet case (FE) (four screws ①).
2. Remove the front panel assembly (two screws ②).

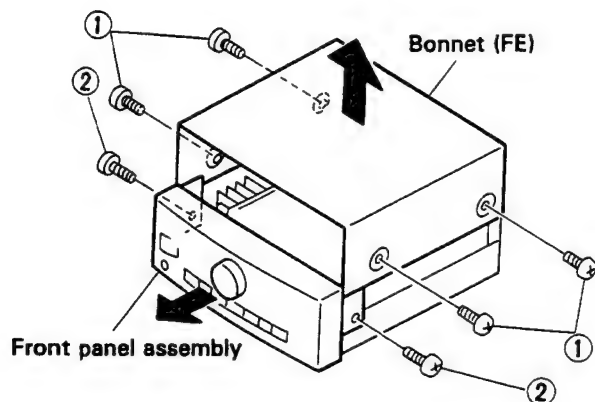


3. Remove the mounting screws of the power transformer (four screws ③).
4. Remove the mounting of screws of the rear panel (three screws ④).
5. Remove the mounting of screws of the fan motor (two screws ⑤).

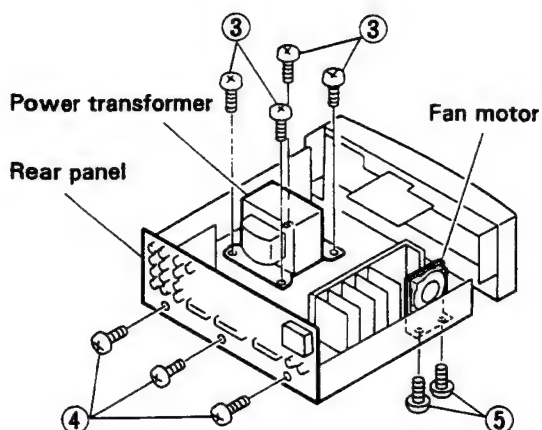


6. Remove the mounting screws of the AF assembly (four screws ⑥).
7. Remove the mounting of screws of the heat sink (two screws ⑦).

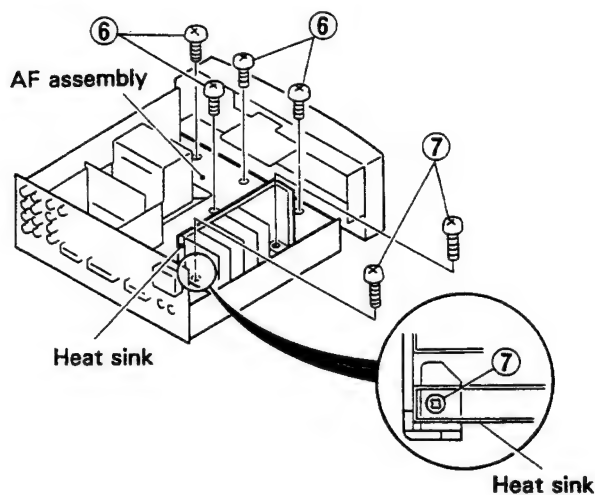

8. Remove the transformer and rear panel from the chassis by lifting them up.

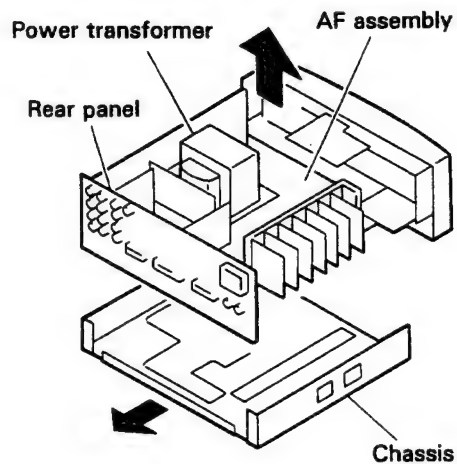

9. Pull the transformer from the AF assembly, and turn and set the main unit so that the heat sink is on the top side.

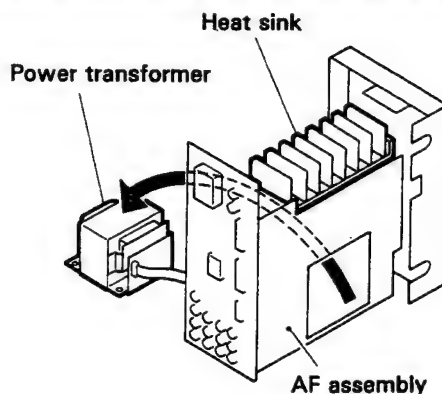

6. IC INFORMATION

• PD5144B (MICRO COMPUTER)

• Pin Function

No.	Pin name	I/O	Establishment	Function
1	+5V	—	—	Connected to +5V Power supply
2	GND	—	—	GND
3	VOLref	—	—	Connected to +5V Power supply
4	FAN ON	O	O	Not used
5	LINE.M	O	N	LINE MUTE
6	A4052A	O	N	AUDIO FUNCTION 4052 A
7	A4052B	O	N	AUDIO FUNCTION 4052 B
8	V4052A	O	N	Not used
9	V4052B	O	N	Not used
10	V.A.M	I/O	N	AUDIO MUTE for VCR/DAT REC OUT
11	P.BASS	I/O	N	P-BASS ON/OFF (A-P510 only)
12	VOL.POSI	I/O	I	Analog input for detection of VR position
13	VOL.DN	I/O	N	Motor VR control (DOWN)
14	VOL.UP	I/O	N	Motor VR control (UP)
15	R.V.ST	I/O	N	Not used
16	R.V.CLK	I/O	N	Not used
17	R.V.DATA	I/O	N	Not used
18	E/R TX	I/O	N/I	SYSTEM BUS EN/REQ (TUNER)
19	E/R GR	I/O	N/I	SYSTEM BUS EN/REQ (GEQ and D.S.P.)
20	E/R CT	I/O	N/I	SYSTEM BUS EN/REQ (TAPE)
21	E/R CD	I/O	N/I	SYSTEM BUS EN/REQ (CD)
22	S.DATA	I/O	N/I	SYSTEM BUS DATA
23	S.CLK	I/O	N	SYSTEM BUS CLOCK
24	PHONE	I/O	I	PHONE presence/absence
25	MIC.M	I/O	N	MIC MUTE
26	RMT IN	I	—	REMOTE CONTROL input
27	GND	—	—	GND
28	RESET	I	—	RESET input
29	X IN	I	—	Connected to ceramic oscillator (4MHz)
30	X OUT	O	—	
31	N.C.	O	—	Not used
32	GND	—	—	GND


No.	Pin name	I/O	Establishment	Function
33	4/3.2	I	I	Switching Destination
34	3.4/2	I	I	Switching Destination
35	J/EX	I	I	Switching Destination
36	KI 5	I	I	KEY SCAN Input
37	KI 4	I	I	KEY SCAN Input
38	KI 3	I	I	KEY SCAN Input
39	KI 2	I	I	KEY SCAN Input
40	KI 1	I	I	KEY SCAN Input
41	LED PHONO	I/O	N	LED PHONO
42	LED LD	I/O	N	LED LD (A-P710 only)
43	LED VCR/DAT	I/O	N	LED VCR/DAT
44	LED CT	I/O	N	LED TAPE
45	LED TX	I/O	N	LED TUNER
46	LED CD	I/O	N	LED CD
47	LED PILLOW	I/O	N	LED PILLOW (A-P710 only)
48	LED P.BASS	I/O	N	LED P-BASS
49	KO3	I/O	N	KEY SCAN Output
50	KO2	I/O	N	KEY SCAN Output
51	KO1	I/O	N	KEY SCAN Output
52	LED AUDI	I/O	N	LED VOCAL CANCEL
53	LED AI B	I/O	N	LED B
54	LED AI A	I/O	N	LED A
55	POW IN	I/O	I	POWER IN
56	FAN ERR	I/O	I	FAN ERR
57	LED SURR	I/O	O	LED SURROUND
58	FAN IN	I/O	I	FAN IN
59	RELAY D	I/O	O	Not used
60	RELAY C	I/O	O	Not used
61	RELAY B	I/O	O	RELAY B (A-P710 only)
62	RELAY A	I/O	O	RELAY A
63	BACK UP	I/O	I	BACK UP
64	POWER	I/O	O	POWER

I : CMOS Input
O : CMOS Output
N : N ch open drain output





7. FOR A – P710/HB AND A – P510/HB TYPES

CONTRAST OF MISCELLANEOUS PARTS




NOTES:

- Parts without part number cannot be supplied.
- The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Parts marked by "●" are not always kept in stock. Their delivery time may be longer than usual or they may be unavailable.

The A – P710/HB type is the same as the A – P710/HE type with the exception of the following sections.

Mark	Symbol & Description	Part No.		Remarks
		A – P710/HE type	A – P710/HB type	
	TRANS PRIMARY assembly	Non supply	Non supply	*1
	FU1 Fuse (T1.25A/250V)	AEK – 510	AEK – 509	
	FU5, FU6 Fuse (T2.5A/250V)	AEK – 403	AEK – 512	
	FU3, FU4 Fuse (T2A/250V)	AEK – 017	AEK – 511	
	AC Power cord	ADG1019	ADG1084	
	Screw	ABA1018	


The A – P510/HB type is the same as the A – P510/HE type with the exception of the following sections.

Mark	Symbol & Description	Part No.		Remarks
		A – P510/HE type	A – P510/HB type	
	TRANS PRIMARY assembly	Non supply	Non supply	*1
	FU5, FU6 Fuse (T2.5A/250V)	AEK – 403	AEK – 512	
	FU3, FU4 Fuse (T2A/250V)	AEK – 017	AEK – 511	
	AC Power cord	ADG1019	ADG1084	

* 1 : A – P710/HE and A – P510/HE of the TRANS PRIMARY assembly are identical assemblies.
A – P710/HB and A – P510/HB of the TRANS PRIMARY assembly are also identical assemblies.

TRANS PRIMARY assembly


The TRANS PRIMARY assembly (A – P710/HB and A – P510/HB) is the same as the TRANS PRIMARY assembly (A – P710/HE and A – P510/HE) with the exception of the following sections.

Mark	Symbol & Description	Part No.		Remarks
		HE type	HB type	
	AC socket (OUTLET 1P)	AKP1034	AKP1035	

8. PANEL FACILITIES

REAR PANEL FACILITIES

STEREO AMPLIFIER: A-P710/A-P510

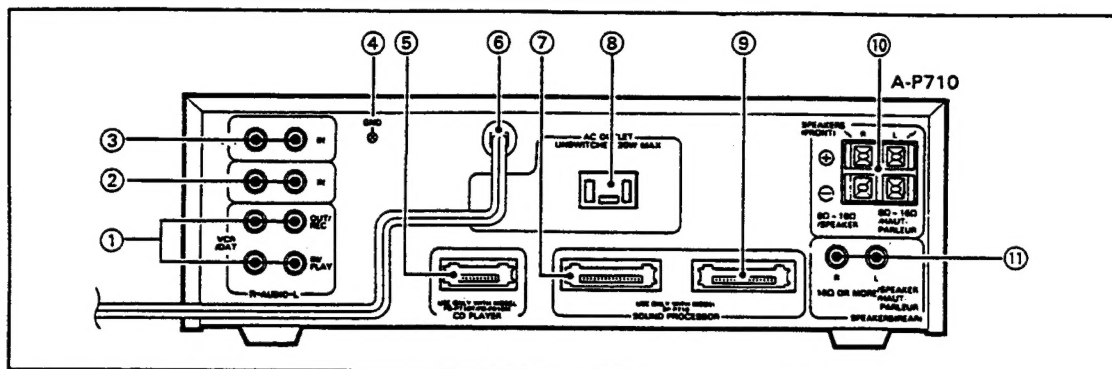

① VCR/DAT jacks

IN/PLAY:

Connect to the audio output jacks of VCR (DAT).

OUT/REC:

Connect to audio input jacks of VCR (DAT).

② LD input jacks (A-P710 only)

Connect to audio output Jacks of LD player.

③ PHONO input jacks

Connect the output cable of the turntable to these jacks.

④ Ground terminal (GND)

Use a screwdriver to connect with the ground terminal.

⑤ CD PLAYER jack (blue)

Connect the CD system cable (blue) here.

⑥ Power cord

Connect this to the AC wall socket.

⑦ SOUND PROCESSOR jack (white) A-P710
SOUND IMAGE CONTROLLER jack (white) A-P510

Connect the SOUND FIELD PROCESSOR (or SOUND IMAGE CONTROLLER) system cable (white) here.

⑧ AC OUTLET (UNSWITCHED 20W MAX)

Power supplied through this outlet is turned on and off by the amplifier's POWER switch. Total electrical power consumption of connected equipment should not exceed 20W. This power outlet is provided for exclusive use with the tuner F-P710(L) only. This power outlet must not be used to provide electricity to any other component or appliance.

NOTE:

In order to avoid overheating or fire risk, do not connect appliances with high power consumption such as heaters, irons, or television sets to the AC OUTLET. This can cause the amplifier to malfunction.

⑨ SOUND PROCESSOR jack (green) A-P710
SOUND IMAGE CONTROLLER jack (green) A-P510

Connect the SOUND FIELD PROCESSOR (or SOUND IMAGE CONTROLLER) system cable (green) here.

⑩ SPEAKERS (FRONT) terminals

L: Connect the left speaker system as seen from the listening position.

R: Connect the right speaker system as seen from the listening position.

NOTE:

Connect a speaker system with a nominal impedance ranging from 8Ω to 16Ω.

⑪ SPEAKERS (REAR) jack


Connect the surround speaker systems.

NOTE:


Connect a speaker system with a nominal impedance of 16Ω or more.

FRONT PANEL FACILITIES

STEREO AMPLIFIER: A-P710

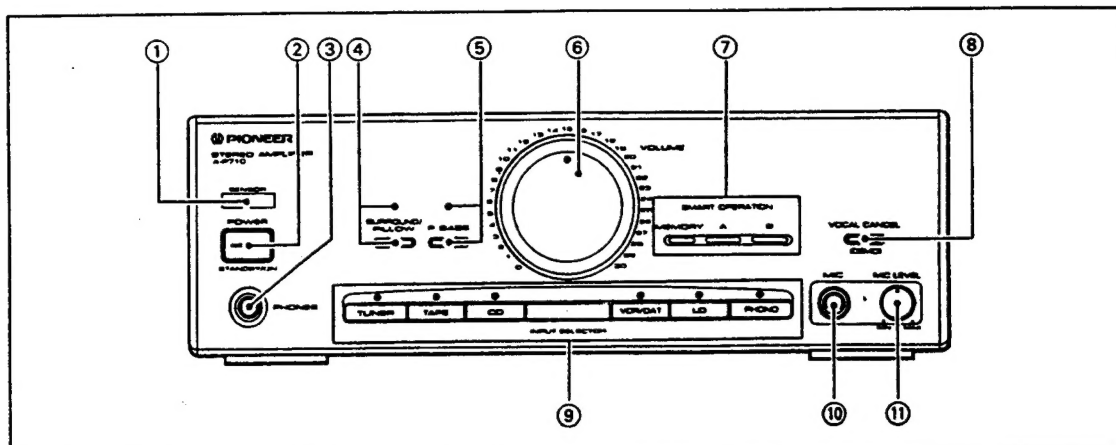

STEREO AMPLIFIER: A-P510

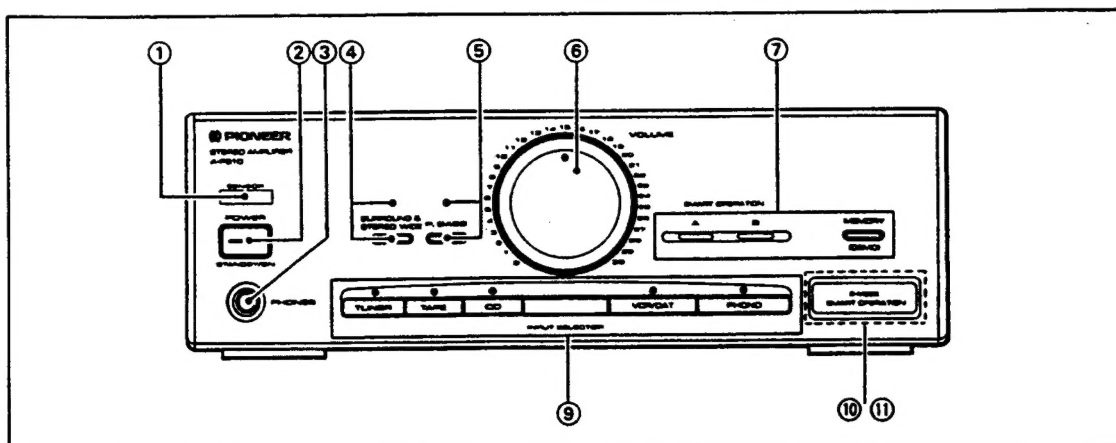

① REMOTE SENSOR window

② POWER STANDBY/ON switch

This is the switch for electric power.

ON: When set to the ON position, power is supplied and the unit becomes operational.

STANDBY: When set to the STANDBY position, the main power flow is cut and the unit is no longer fully operational. A minute flow of power feeds the unit to maintain operation readiness.

The tuner section display indicates only the time.

③ **PHONES (Headphone) jack**

For stereo headphones.

NOTE:

There is no speaker output when headphones are plugged into the PHONES jack.

④ **SURROUND/PILLOW button and indicator (A-P710 only)**

This button allows one-touch switching between the surround speakers and front speakers. The indicator lights orange when SURROUND is selected, and red when PILLOW is selected. When PILLOW is selected, no sound is output from the front speakers.

④ **SURROUND & STEREO WIDE button and indicator (A-P510 only)**

Use this button to select "surround & stereo wide" or normal listening conditions. When surround speakers are connected, the unit switches automatically to "surround" effect, and it switches to "stereo wide" effect if surround speakers are not connected.

⑤ **P. BASS button and indicator**

Set to ON to augment bass frequency response.

⑥ **VOLUME control**

⑦ **SMART OPERATION buttons**

A, B: To operate the SMART OPERATION function and set the data.

MEMORY: To set the data for SMART OPERATION.

⑧ **VOCAL CANCEL button (A-P710 only)**

When set to ON, the sound volume of vocal sounds is lowered. The sound field processor's SOUND JOG control can also be used to set the vocal volume to the lowest level.

⑨ **INPUT SELECTOR buttons**

TUNER: Press to listen to radio broadcasts.

TAPE: Press to listen to cassette tapes.

CD: Press to listen to a CD player.

PHONO: Press to play records on a turntable connected to the PHONO jacks.

LD: Press to play a LaserDisc player connected to the LD jacks (A-P710 only).

VCR/DAT: Press to play a tape on a video cassette recorder (or DAT) connected to the VCR/DAT jacks.

⑩ **MIC (Microphone) jack (A-P710 and A-P510 (multi-voltage model) only)**

⑪ **MIC LEVEL control (A-P710 and A-P510 (multi-voltage model) only)**

9. SPECIFICATIONS

STEREO AMPLIFIER: A-P710

Amplifier Section

Continuously Average Power Output is 32 Watts* per channel, min., at 8 ohms from 40 Hertz to 20,000 Hertz, with no more than 0.9% total harmonic distortion

* Measured pursuant to the Federal Trade Commission's Trade Regulation rules on Power Output Claims for Amplifiers

Continuous power output (DIN)

U.K., European models 40 W + 40 W
(1 kHz, T.H.D 1%, 8 ohms)

Continuous power output (RMS)

U.K., European models 46 W + 46 W
(1 kHz, T.H.D 5%, 8 ohms)

Multi-voltage models 40 W + 40 W
(1 kHz, T.H.D 5%, 8 ohms)

Music power (DIN)

U.K., European models 68 W + 68 W
(1 kHz, T.H.D 10%, 8 ohms)

Multi-voltage models 58 W + 58 W
(1 kHz, T.H.D 10%, 8 ohms)

Peak music power

(Multi-voltage models only) 305 W

Total harmonic distortion,

1 kHz, 20 W, 8 ohms 0.2% *

Electrical Section, Other

Power requirements

European models AC 220 V, 50/60 Hz

U.K., models AC 240 V, 50/60 Hz

Multi-voltage models AC 110/120-127/
220/240 V (switchable), 50/60 Hz

Power consumption

European model 180 W

Multi-voltage model 190 W

AC outlet Switched: 20 W or less
(for exclusive use with F-P710 (L)).

External dimensions

260 (W) x 83.5 (H) x 260 (D) mm

10-3/16 (W) x 3-1/4 (H) x 10-3/16 (D) in

Weight 4.0 kg (8 lb 13 oz.)

* Measured with audio spectrum analyzer.

STEREO AMPLIFIER: A-P510

Amplifier Section

Continuously Average Power Output is 32 Watts* per channel, min., at 8 ohms from 40 Hertz to 20,000 Hertz, with no more than 0.9% total harmonic distortion

* Measured pursuant to the Federal Trade Commission's Trade Regulation rules on Power Output Claims for Amplifiers

Continuous power output (DIN)

U.K., European models 35 W + 35 W
(1 kHz, T.H.D 1%, 8 ohms)

Continuous power output (RMS)

U.K., European models 39 W + 39 W
(1 kHz, T.H.D 5%, 8 ohms)

U.S., Canadian models 38 W + 38 W
(1 kHz, T.H.D 5%, 8 ohms)

Multi-voltage models 40 W + 40 W
(1 kHz, T.H.D 5%, 8 ohms)

Music power (DIN)

U.K., European models 57 W + 57 W
(1 kHz, T.H.D 10%, 8 ohms)

Multi-voltage models 58 W + 58 W
(1 kHz, T.H.D 10%, 8 ohms)

Peak music power

(Multi-voltage models only) 305 W

Total harmonic distortion,

1 kHz, 17.5 W, 8 ohms 0.2% *

Electrical Section, Other

Power requirements

European models AC 220 V, 50/60 Hz

U.K., models AC 240 V, 50/60 Hz

U.S., Canadian models AC 120 V, 60 Hz

Multi-voltage models AC 110/120-127/
220/240 V (switchable), 50/60 Hz

Power consumption

European model 170 W

U.S., Canadian models 115 W

Multi-voltage model 190 W

AC outlet Switched: 20 W or less
(for exclusive use with F-P710 (L)).

External dimensions

260 (W) x 83.5 (H) x 260 (D) mm

10-3/16 (W) x 3-1/4 (H) x 10-3/16 (D) in

Weight 3.9 kg (8 lb 9 oz.)

* Measured with audio spectrum analyzer.

NOTE:

The specifications and design of this product are subject to change without notice, due to improvements.